



2019 Product Data Guide

Commercial Vehicle Tires

2019 Product Data Guide Commercial Vehicle Tires to fit your needs.

As an international partner to the transport and logistics industry, we know the markets as well as we know the roads around the world. And we also know that ultimately, cost effectiveness is what matters.

But just like roads, no two operations are the same. That's why we developed Continental Truck Tires - the ideal solution to deliver your **Lowest Overall Driving Cost.**

DELIVERING YOUR LOWEST OVERALL DRIVING COST. One of the largest automotive suppliers and tire manufacturers in the world, Continental develops pioneering technologies to make your fleet safer, more efficient, and more connected. With innovative tire technology and digital fleet solutions, Continental optimizes your tire lifecycle management. Count on Continental to recommend the best tires and solutions for your specific fleet needs.

IMPORTANT NOTE:

Product details are subject to change. If the information you are looking for is not in this data guide, please visit www.continental-truck.com or contact your local sales representative for the most up to date information.

Table of Contents

*Available in ContiTread™

OVERVIEW

Application Guide.....	04	HSR2.....	43	HDC1*.....	76
Truck Tire Product Overview.....	06	HSR2 Eco Plus.....	44	HDC1 HT*.....	77
Truck Tire Availability Chart.....	11	HSR2 SA.....	45	HTC1*.....	78
Truck Tire Comparison Chart.....	12	Conti LAR 3.....	46	HTC.....	79
ContiTread™ Product Overview.....	14	HTR2*.....	47	ContiTread™ Retread Products...	80
Retread Availability Chart.....	16	LSR1 - 17.5**.....	48	OFF-ROAD APPLICATION.....	82
Retread Comparison Chart.....	19	HDR2*.....	49	Truck Tire Product Overview.....	83

PRODUCT DATA

LONG HAUL APPLICATION.....20

Truck Tire Product Overview.....	21
Conti EcoPlus HS3.....	22
Conti Coach HA3.....	23
Conti HSL 3 / Conti Hybrid HS3.....	24
HDL2.....	25
HDL2 Eco Plus*.....	26
HDL2+ Eco Plus.....	27
HDL2 DL*.....	28
HDL2 DL Eco Plus*.....	29
HDL Eco Plus*.....	30
Conti EcoPlus HT3*.....	31
HTL1*.....	32
HTL2 Eco Plus.....	33
ContiTread™ Retread Products...	34

REGIONAL APPLICATION.....39

Truck Tire Product Overview.....	40
Conti HSR 3* / Conti CrossTrac HA3*.....	42

HSR2.....	43
HSR2 Eco Plus.....	44
HSR2 SA.....	45
Conti LAR 3.....	46
HTR2*.....	47
LSR1 - 17.5**.....	48
HDR2*.....	49
HDR2 Eco Plus*.....	50
Conti Hybrid HD3.....	51
HDR.....	52
HDW2*.....	53
Conti Hybrid HT3*.....	54
HTR2 - 17.5".....	55
Conti Hybrid HS3 - 19.5".....	56
HSR - 19.5**.....	57
Conti Hybrid HD3 - 19.5".....	58
HDR - 19.5".....	59
Conti Scandinavia HD3 - 19.5".....	60
Conti Hybrid HT3 - 19.5".....	61
ContiTread™ Retread Products...	62

URBAN APPLICATION.....68

Truck Tire Product Overview.....	69
Conti Urban HA3.....	70
Conti HAU 3 WT* / Conti CityService HA3*.....	71
ContiTread™ Retread Products...	72

CONSTRUCTION APPLICATION..73

Truck Tire Product Overview.....	74
HSC1*.....	75

DIGITAL SOLUTIONS

Introduction.....	89
ContiConnect® / ContiConnect® Light.....	90
ContiPressureCheck®.....	91
ContiPressureCheck® Solo.....	92






TABLES/CHARTS

Medium Truck Load/Inflation Tables...	94
Load Limits at Various Speeds.....	98
Definitions.....	100
Low Aspect Ratio Tires.....	101
Safety Warnings.....	102
Service Descriptions.....	105
International Load Index Numbers.....	106
Tread Wear Conversion Table.....	107
Retread Casing Fitment Guide.....	108

Conti Highlights


Straight4ward: New Nomenclature.....	05	Conti360° Fleet Services.....	67
Conti 3G Casing.....	10	Digital Tire Monitoring Solutions.....	88
EPA SmartWay.....	13	ContiLink.....	93
ContiLifeCycle™ Process.....	18	HorsePower Rewards Program.....	111
TrukFix Road Service Program.....	38		

Application Guide

	 LONG HAUL Our most fuel efficient tires, designed for highway traffic over long distances with even wear. <ul style="list-style-type: none"> • Lowest fuel consumption • Maximum mileage performance • Comfortable ride 	 REGIONAL Flexible tires offering good fuel efficiency on the highway, with excellent durability for off-highway driving. <ul style="list-style-type: none"> • Excellent wear resistance • Optimal traction on diverse roads • All-weather suitability 	 URBAN Reinforced, durable tires that tackle the challenges of city traffic with ease. <ul style="list-style-type: none"> • High resistance to curb damage • Very high mileage • Handles rapid changes of city traffic 	 CONSTRUCTION Take on the tough terrain of job sites and varied road conditions with these durable, high traction tires. <ul style="list-style-type: none"> • High mileage on the road • Maximum equipment up-times • Resists damage off the road 	 OFF-ROAD Our most durable, highest traction tires that perform their best in extreme locations. <ul style="list-style-type: none"> • Maximum durability for toughest conditions • Great traction on the harshest terrain • High carrying capacity for heavy loads 	
STEERING AXLE	Conti EcoPlus HS3	HSR - 19.5"	Conti Urban HA3	HSC1		
		HSR2				
	Conti Coach HA3	HSR2 Eco Plus	Conti HAU 3 WT / Conti CityService HA3		HCS	
		HSR2 SA				
		Conti LAR 3				
		HTR2		HTC1		
	Conti HSL 3 / Conti Hybrid HS3					
			Conti Hybrid HS3 - 19.5"			
DRIVING AXLE	HDL2	HDR2			HDO	
	HDL Eco Plus	HDR2 Eco Plus		HDC1	Conti Terra HD3 - 19.5"	
	HDL2 Eco Plus	HDW2		HDC1 HT		
	HDL2 DL Eco Plus	HDR - 19.5"				
	HDL2 DL					
	Conti Hybrid HD3					
	HDL2+ Eco Plus					
		Conti Hybrid HD3 - 19.5"				
		Conti Scandinavia HD3 - 19.5"				
TRAILING AXLE	Conti Eco Plus HT3			HTC		
	HTL1	HTR2 - 17.5"				
	HTL2 Eco Plus					
	Conti Hybrid HT3					
	Conti Hybrid HT3 - 19.5"					

Tires in the Steering axle position are also suitable for trailing axles on trucks and as all-position fitment where traction is not of paramount importance.

New Nomenclature | Four Steps to Targeting Better Tire Placement

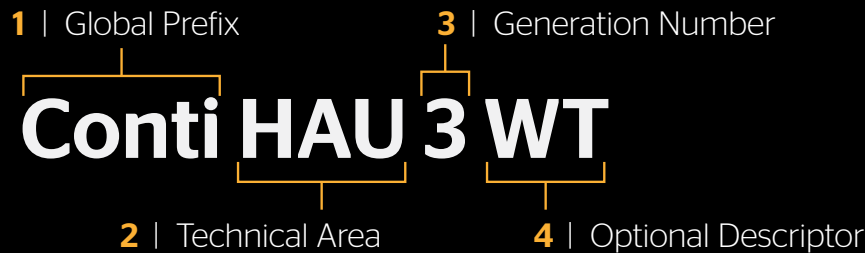


Step 1 Global Prefix

Moving forward, every new tire will begin with Conti (or ContiTread for retread), regardless of segment, region, or application. This universal prefix will help unify our diverse product line.

Step 2 Technical Area

This area provides essential information to help ensure the right tire goes on the right vehicle.

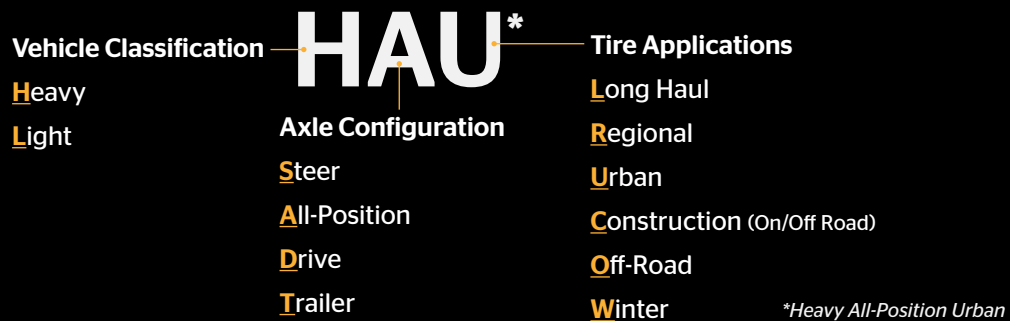

Step 3 Generation Number

1st, 2nd, 3rd, etc.





Step 4 Optional Descriptor

Although it may be left blank, this space covers additional information about a tire's specialized characteristics to help our customers find the optimal tire.

EP Eco Plus | **DL Deep Lug** | **WT Waste Transport** | **& more...**

PLEASE NOTE: If these two characters are included, they are part of the tire name and essential to its identification. For example, a **Conti HSL 3** and a **Conti HSL 3 EP** could both exist, and would be two entirely different tires with different tread patterns, article numbers, and benefits.

Legend:

 3G Casing	 SmartWay Verified	 With TPMS Sensor	 Retread Available
--	--	---	--

Steer/All-Position Product Overview



Conti EcoPlus HS3
 3G   



Conti Coach HA3
 3G   






Conti HSL 3
 3G   
(Rename of Conti Hybrid HS3)



Conti HSR 3
 3G   
(Rename of Conti CrossTrac HA3)




HSR2
 3G   






HSR2 Eco Plus
 3G   



HSR2 SA
 3G   



Conti LAR 3
 3G   



HTC1
 3G   



HTR2
 3G   



LSR1
 3G   



Conti Urban HA3
 3G   



Conti HAU 3 WT
 3G   
(Rename of Conti CityService HA3)







HSC1
 3G   



HCS
 3G   





Legend:

 3G Casing	 SmartWay Verified	 With TPMS Sensor	 Retread Available
--	--	---	--

Drive Position Product Overview

 HDL2 3G   	 HDL2 Eco Plus 3G   	 HDL2+ Eco Plus 3G   	 HDL2 DL 3G   	 HDL2 DL Eco Plus 3G   
 HDL Eco Plus 3G   	 HDR2 3G   	 HDR2 Eco Plus 3G   	 Conti Hybrid HD3 3G   	 HDR 3G   
 HDW2 3G   	 HDC1 3G   	 HDC1 HT 3G   	 HDO 3G   	

Legend:

 3G Casing	 SmartWay Verified	 With TPMS Sensor	 Retread Available
--	--	---	--

Trailer Position **Product Overview**



Conti Eco Plus HT3
 3G   



HTL1
 3G   



HTL2 Eco Plus
 3G   



Conti Hybrid HT3
 3G   



HTR2 - 17.5"
 3G   



HTC
 3G   

Legend:

 3G Casing	 SmartWay Verified	 With TPMS Sensor	 Retread Available
--	--	---	--

19.5" Tires Product Overview



Conti Hybrid HS3 - 19.5"

3G   



HSR - 19.5"

3G   



Conti Hybrid HD3 - 19.5"

3G   



HDR - 19.5"

3G   



Conti Scandinavia HD3 - 19.5"

3G   



Conti Hybrid HT3 - 19.5"

3G   



Conti Terra HD3 - 19.5"

3G   

3Gasing

A Next-Generation Solution for Easier Casing Management and Maximum Retreadability

Increased Belt Cord Angles

Belt features increased stiffness and improved penetration resistance. Innovative belt package designed to reduce heat and increase durability.

Increased Tread Volumes

Wider tread platform allows the casing to better support the tire's given load range. Tread features a wide cavity, with a standard retread width to provide a single platform for greater ease of retreading.

Technologically Advanced Bead Core

Core designed for structural durability and extended product life. Core is made from a tear-resistant compound at steel cord edges.

Heat Dissipating Polymers



Fuel Savings



Increased Mileage



Improved Retreadability



Standardized Casing

These Continental Tires are Built on the Innovative 3G Casing:



Truck Tire Comparison Chart

	CONTINENTAL	MICHELIN	GOODYEAR	BRIDGESTONE
Steer/All-Position	Conti EcoPlus HS3	X Line Energy Z	Endurance LHS	R283A Ecopia
	Conti EcoPlus HS3 (295/60R22.5)	X Line Energy Z	Marathon LHS II	-
	Conti HSL 3 / Conti Hybrid HS3	X Multi Energy Z	Fuel Max RSA	R283S Ecopia
	Conti Coach HA3	X Line Energy Z Coach	G670 RV MRT	-
	Conti HSR 3 / Conti CrossTrac HA3	XZE2	Endurance RSA	R250 ED
	HSR2	XZE2	Endurance RSA	R250 F
	HSR2 Eco Plus	-	G662 RSA Fuel Max	R268 Ecopia
	HSR2 SA	XZE2+, X Multiway XZE	G670 RV MRT	R250 ED
	Conti Urban HA3	X InCity Z	-	-
	Conti HAU 3 WT / Conti CityService HA3	XZUS2	Endurance WHA	M870
	HSC1	X Works Z	G751 MSA	M864
	HCS	XZL, XZL+	G278 MSD	L315
	HTR2	XFE	-	R244
	HTC1	XZY3	G296 MSA	M864
	LSR1 - 17.5"	XZA	G114 LHT	-
	Drive	LSR1 - 16"	XPS RIB	G949 RSA Armor Max
Conti LSR3		XPS RIB	G949 RSA Armor Max	Duravis R250
HDL2		X Line Energy D	Endurance LHD	M710 Ecopia
HDL2 Eco Plus		X-One Line Energy D	Fuel Max SSD	Greatec M835 Ecopia
HDL2+ Eco Plus		X Multi D	-	M749
HDL2 DL		XDA5+	G572A 1AD Fuel Max	M726 EL
HDL2 DL Eco Plus		X Multi Energy D	G572A LHD Fuel Max	M726 ELA
HDL Eco Plus		XDA Energy	Fuel Max LHD G505D	-
Conti Hybrid HD3		XDN2	Marathon LHD	M760 Ecopia
HDR2		X Multi D	G182 RSD	M770
HDR2 Eco Plus		-	G182 RSD GHG	-
HDR		XD2	G622 RSD	M726
HDC1		X Works XDY	G282 MSD	M799
HDC1 HT		XDE M/S	Workhorse MSD	M775
HDO		XDY-EX2	G741 MSD	L317, L320
Trailer		HDW2	XDS2	-
	Conti EcoPlus HT3	X Line Energy T	Fuel Max LHT	R197 Ecopia, R123 Ecopia
	HTL2 Eco Plus	XTA2 Energy	G114 LHT	R184
	HTL1	X One Line Energy T	Fuel Max SST	Greatec R197 Ecopia
	Conti Hybrid HT3	XTE	G619 RST	R196, R250F
	HTR2 - 17.5"	X Multi T	G114 LHT	R184
19.5" Tires	HTC	-	G731 MSA	M840
	Conti Hybrid HS3 - 19.5"	XZE	Endurance RSA	R238, R250F, R227F
	Conti Hybrid HD3 - 19.5"	X Multi D	-	M724F, M895
	Conti Hybrid HT3 - 19.5"	X Line Energy T	G159A	-
	HSR - 19.5"	XZE	G647 RSS	R250F
	HDR - 19.5"	XDS 2	G622 RSD ULT	-
	Conti Scandinavia HD3 - 19.5"	XDS 2	-	M729F
Conti Terra HD3 - 19.5"	-	-	-	

EPA SmartWay®

Reducing Transportation-Related Emissions and Improving Supply Chain Fuel Efficiency

Verified Low-Rolling Resistance Tire Products

The EPA has determined that certain tire product models and technologies can reduce NOx emissions and fuel use by 3 percent or more, relative to the best-selling products for line haul class 8 tractor trailers. These improvements are achieved under the following conditions:

- Tires are used in the correct axle positions.
- Verified low rolling resistance tires are installed on all of the axle positions of the tractor and trailer.
- All tires must be properly inflated according to the manufacturer's specifications.

For more information on SmartWay or to review the list of SmartWay verified low rolling resistance tires and retread technologies, visit www.epa.gov/smartway.

More tires and retreads may currently be verified by SmartWay. Always review the SmartWay website for current information.



Fuel Savings



Cleaner Air



Cost Savings



Environmentally Friendly

The following Continental low-rolling resistance tire products are SmartWay verified when used on class 8, line-haul tractor trailers:

































ContiTread™ Retreads: HDL Eco Plus, HDR1 Eco Plus, HDR2 Eco Plus, HDL2 Eco Plus, HDL2 DL Eco Plus, HTL Eco Plus, HTL1, EcoPlus HT3

Conti Tread™ Product Overview


All-Position

 HSR 3  	<i>(Rename of CrossTrac HA3)</i>  HSR - 18/32"  	 HSR - 16/32"  	 HSR1  	 HSC  
 HSC1  	<i>(Rename of CityService HA3)</i>  HAU 3 WT  	 HCS  	 LSR1  	

Drive Position


 HDL Eco Plus  	 HDL  	 HDR2  	 HDR2 Eco Plus  	 HDR1  
 HDR1 Eco Plus  	 HDL2 DL  	 HDL2 DL Eco Plus  	 HDC1  	 HDC1 HT  

Legend:




Conti Tread™ Product Overview

Drive Position (continued)

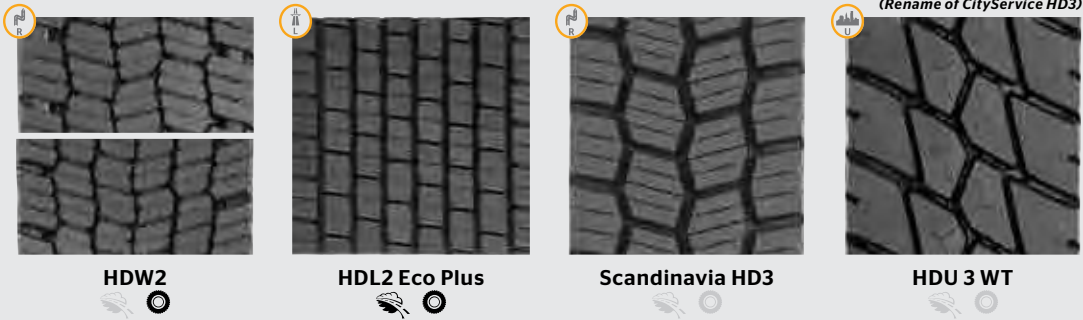

Trailer Position

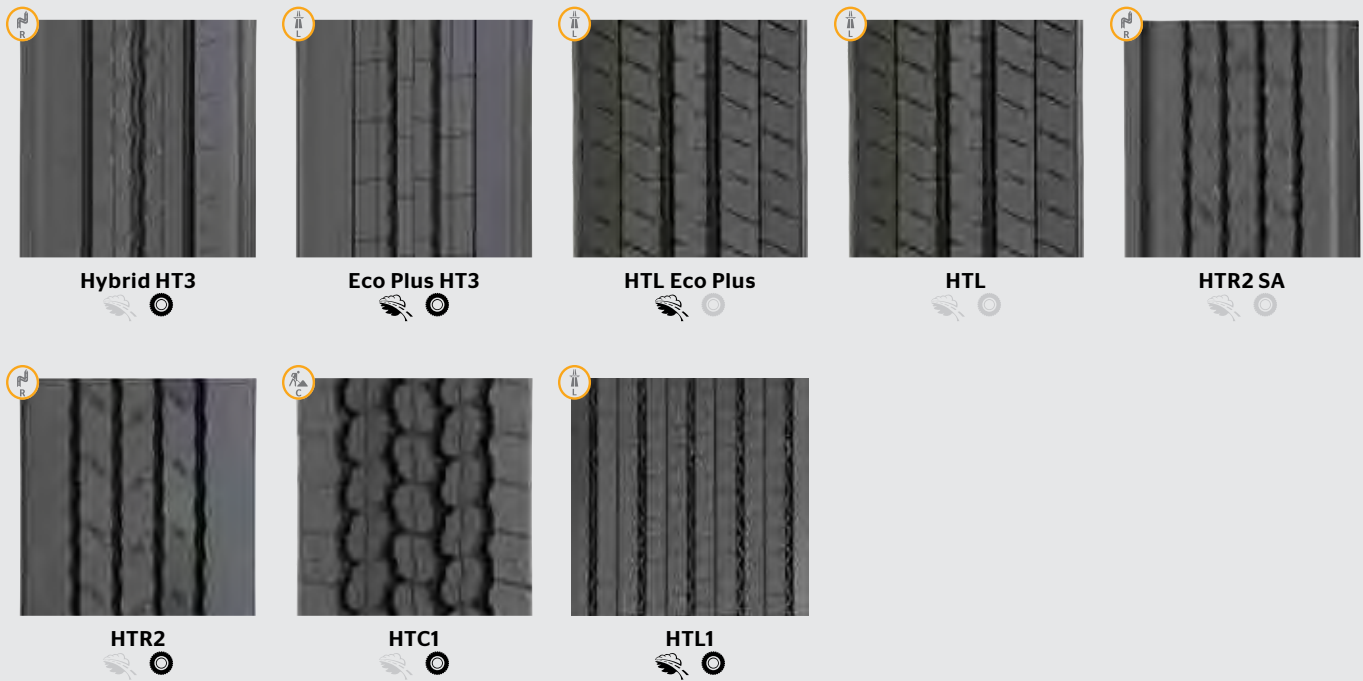

ContiTread™

Retread Availability Chart

TREAD	160	170	180	185	188	190	195	200	205	210	215	220	225	230	235	240
HSR							18/32"				18/32"		18/32"		18/32"	
HSR - 16			16/32"				16/32"									
HSR1									16/32"		16/32"		16/32"		16/32"	
HSR 3 / CrossTrac HA3						20/32"		20/32"		20/32"		20/32"		20/32"		20/32"
HSC - 23											23/32"		23/32"		23/32"	
HSC - 18											18/32"		18/32"		18/32"	
HSC1											24/32"		24/32"		24/32"	
HAU 3 WT / CityService HA3										26/32"		26/32"		26/32"		26/32"
HCS											32/32"		32/32"		32/32"	
LSR1	15/32"		15/32"		15/32"		15/32"		15/32"							
HDL Eco Plus - 26											26/32"		26/32"		26/32"	
HDL Eco Plus - 20											20/32"		20/32"		20/32"	
HDL - 26											26/32"		26/32"		26/32"	
HDL - 20											20/32"		20/32"		20/32"	
HDL - 13								13/32"			13/32"		13/32"		13/32"	
HDR1 - 16	16/32"	16/32"	16/32"			16/32"	16/32"	16/32"			16/32"					
HDR1						20/32"	20/32"	20/32"			22/32"		22/32"		22/32"	
HDR1 - 26											26/32"		26/32"		26/32"	
HDR2 - 22				22/32"			22/32"									
HDR2 - 26									26/32"		26/32"		26/32"		26/32"	
HDR2 Eco Plus											26/32"		26/32"		26/32"	
HDU 3 WT / CityService HD3										32/32"		32/32"		32/32"		32/32"
HDC1											26/32"		26/32"		26/32"	
HDC1 HT												32/32"		32/32"		
HDL2 Eco Plus																
HDL2 DL											28/32"		28/32"		28/32"	
HDL2 DL Eco Plus											28/32"		28/32"		28/32"	
HDW2											27/32"		27/32"		27/32"	
Scandinavia HD3										25/32"		25/32"		25/32"		25/32"
EcoPlus HT3											13/32"		13/32"		13/32"	
HTL Eco Plus								13/32"		13/32"		13/32"		13/32"		13/32"
HTL								13/32"		13/32"		13/32"		13/32"		13/32"
HTL1																
HTR2																
HTR2 SA								16/32"								16/32"
Hybrid HT3								16/32"		16/32"		16/32"		16/32"		
HTC1																

ContiTread™

Retread Availability Chart (continued)

TREAD (continued)	245	250	255	260	270	280	290	320	340	350	360	380	390	400	410
HSR															
HSR - 16															
HSR1															
HSR 3 / CrossTrac HA3															
HSC - 23															
HSC - 18	18/32"		18/32"												
HSC1	24/32"		24/32"												
HAU 3 WT / CityService HA3		26/32"		26/32"	26/32"	26/32"									
HCS	32/32"										32/32"	32/32"			
LSR1															
HDL Eco Plus - 26	26/32"														
HDL Eco Plus - 20	20/32"														
HDL - 26	26/32"														
HDL - 20	20/32"														
HDL - 13															
HDR1 - 16															
HDR1	22/32"														
HDR1 - 26	26/32"														
HDR2 - 22															
HDR2 - 26	26/32"														
HDR2 Eco Plus	26/32"														
HDU 3 WT / CityService HD3		32/32"		32/32"	32/32"	32/32"									
HDC1	26/32"			26/32"		26/32"									
HDC1 HT	32/32"														
HDL2 Eco Plus													24/32"	24/32"	
HDL2 DL	28/32"			28/32"											
HDL2 DL Eco Plus	28/32"														
HDW2	27/32"			27/32"											
Scandinavia HD3															
EcoPlus HT3	13/32"														
HTL Eco Plus															
HTL															
HTL1													13/32"	13/32"	13/32"
HTR2								22/32"	22/32"	22/32"					
HTR2 SA		16/32"		16/32"	16/32"										
Hybrid HT3															
HTC1								24/32"		24/32"					

ContiLifeCycle™ Process

Technology Driven for High-Quality Retreading

8 Process Control

Constant process and quality optimization by our globally connected retread specialists.

1 Inspection & Shearography

Thorough initial casing inspection using state-of-the-art technology.

2 Buffing

Precise buff contours and consistent under-tread thickness by computer controlled buffing.

7 Final Inspection

Detailed final inspection, ending with high pressure testing.

6 Curing

Ideal retread curing with precisely controlled time, temperature, vacuum and pressure.

3 Skiving & Repairs

Professional casing skiving and repairs, conducted by Continental trained operators.

5 Enveloping

Our modern enveloping technology enables an optimum curing process.

4 Tread Building

Optimum casing fitting, ensured by laser guided tread application.

To learn more, contact your Continental representative today!

Conti**Tread**™

Retread Comparison Chart

CONTINENTAL	BANDAG	MICHELIN	GOODYEAR
HAU 3 WT / CityService HA3	BRM2, BRM3	XZUS	G686
HCS - 32	BDY2	XZL, XZH	G177 Modified
HDC1 - 26	BDX	XDE M/S	G677 MSD
HDC1 HT - 32	BDY2	XDY-EX	G741 MSD
HDL - 26	Ultra Drive	XDA-HT	G362
HDL - 20	FCR Drive	XDHT	G362
HDL - 13	BTT2	XDC LL	G362
HDL Eco Plus - 26	B710 Fuel Tech	XDA2	G572 LHD Fuel Max
HDL Eco Plus - 20	FCR Drive	XDA2	Fuel Max LHD G505D
HDL2 DL - 28	MegaTrek	XD4	G328
HDL2 DL Eco Plus - 28	FuelTech Drive	XDA2	G572 LHD Fuel Max
HDL2 Eco Plus - 24	B835 FuelTech	X One Line Energy D	G392 SSD Fuel Max
HDR1 - 26	Ultra Drive	XDC	G338
HDR1 - 22	BDR-AS	XDC	G622
HDR1 - 20	BDL	XDC	G622
HDR1 - 16	BDL	XDC	G622 LT
HDR1 Eco Plus - 22	BDR-AS	XDC	G622
HDR2 - 26	BDR-HT3	XDN2	G282 MSD
HDR2 - 22	BDR-AS	XDN2	G167
HDR2 Eco Plus - 26	-	-	G682 RSD Fuel Max
HDU 3 WT / CityService HD3	BDM3, BDM2	XDUS	-
HDW2 - 27	BDR-W	XDS2	G622 RSD
Scandinavia HD3	-	XDS2	-
HSC - 23	RTP	XZY3	G287 MSA
HSC - 18	BRX	XZY	G287 MSA
HSC1 - 24	BRM2	XZY3	G287 MSA
HSR - 18	Ultra All Position	XZE	G661 HSA
HSR - 16	FCR Rib	XZE	G661 HSA
HSR1 - 16	FCR Rib	XZA	G647 RSA
HSR2 - 18	Ultra All Position	XZE	G661 HSA
HTC1 - 24	BRM-WB	XZY Wide Base	G296 MSA
HTL - 13	FCR	XTA-1	G314
EcoPlus HT3 - 13	FuelTech Trailer	XT-1AT	G316 AT Fuel Max
HTL Eco Plus - 13	FuelTech Trailer	XT-1AT	G316 AT Fuel Max
HTL1 - 13	B135 FuelTeck	X One Line Energy T	G394 SST Fuel Max
HTR2 - 22	ECL ST-M	XZA Wide Base	G296 MSA
HTR2 SA - 16	BTL-SA	XZE-SA	G619 RST
Hybrid HT3 - 16	BTL-SA	XZE-SA	G619 RST
LSR1 - 15	FCR Rib	XZA	G159

Long Haul For Long-Distance Highway Driving





High Removal Mileage // Low Rolling Resistance // Even Wear // Optimal Retreadability

Engineered for your application. Tires for Long Haul use are designed for straight line, on-highway driving, distributing freight from state to state across great distances. Tires are optimized for high removal miles and fuel efficiency.

IMPORTANT NOTE: Tire Products are now classified by route. Product details are subject to change, please visit our website or contact your local sales representative for the most up to date information.



Legend:

 3G Casing	 SmartWay Verified	 With TPMS Sensor	 Retread Available
--	--	---	--

Long Haul

Truck Tire Product Overview



Conti EcoPlus HS3
3G   





Conti Coach HA3
3G   



Conti HSL 3
3G   
(Rename of Conti Hybrid HS3)



HDL2
3G   



HDL2 Eco Plus
3G   



HDL2+ Eco Plus
3G   



HDL2 DL
3G   



HDL2 DL Eco Plus
3G   



HDL Eco Plus
3G   



Conti Eco Plus HT3
3G   







HTL1
3G   



HTL2 Eco Plus
3G   

Legend:

 3G Casing	 SmartWay Verified	 With TPMS Sensor	 Retread Available
--	--	---	--

Conti EcoPlus HS3

Fuel Efficient Long Haul Steer

GOODS PEOPLE CONSTRUCTION



PRODUCT DATA



TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	SINGLE	DUAL
					LBS, PSI (KG, KPa)		LBS, PSI (KG, KPa)														
11R22.5	G	05110530000	19	75	19.5	495	41.8	1062	11.7	296	13.1	331	8.25, 750	12.5	318	495	308	123	56	6175, 105 (2800, 720)	5840, 105 (2650, 720)
11R22.5	H	05110520000	19	75	19.5	495	41.8	1062	11.7	296	13.1	331	8.25, 750	12.5	318	495	308	127	58	6610, 120 (3000, 830)	6005, 120 (2725, 830)
295/60R22.5* (Tread B)	J	05110840000	15	75	17.1	434	37.0	940	11.5	292	12.0	304	9.00, 975	12.9	329	574	356	110	50	7390, 130 (3350, 900)	6780, 130 (3075, 900)
295/75R22.5	G	05110510000	19	75	18.7	475	39.9	1013	11.4	290	12.3	312	8.25, 900	12.5	318	519	322	114	52	6175, 110 (2800, 760)	5675, 110 (2575, 760)
295/75R22.5	H	05110580000	19	75	18.7	475	39.9	1013	11.4	290	12.3	312	8.25, 900	12.5	318	519	322	120	54	7160, 120 (3250, 830)	6610, 120 (3000, 830)
11R24.5	H	05110560000	19	75	20.4	518	43.8	1113	11.7	297	13.1	333	8.25, 750	12.5	318	472	293	138	63	7160, 120 (3250, 830)	6610, 120 (3000, 830)
285/75R24.5	H	05110540000	19	75	19.3	490	41.5	1054	11.4	289	12.9	38	8.25	12.5	318	499	310	123	56	6780, 120 (3075, 830)	6175, 120 (2800, 830)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. * - ECE Certified. 295/60R22.5 size designated for car carrier application. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



New tread profile reduces sensitivity to road surface, fleet, and vehicle variations allowing for improved performance throughout tire life.



Advanced compounding balances cut and tear resistance with optimized rolling resistance satisfying EPA SmartWay and CARB requirements.



Superior casing construction allows high air dispersion for improved durability and retreadability.

Applications: Long Haul

 3G Casing	 SmartWay Verified	 With TPMS Sensor	 Retread Available
--	--	---	--

Conti Coach HA3 (with Active Sensor)

All-Position Long Haul Coach

● GOODS ● PEOPLE ● CONSTRUCTION



PRODUCT DATA



TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIMS)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)
315/80R22.5 *	L	05651710000	17	75	19.7	501	42.4	1077	12.4	315	13.6	345	9.00, 8.25	13.8	351	488	303	141	64	9090, 130 (4125, 900)	8270, 130 (3750, 900)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. These specifications subject to change without notice. * - ECE Certified # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. 315/80R22.5 tires used on 8.25" rims are restricted to a maximum of 7610 lbs at 120 psi. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.




Extra load-carrying capacity with a specially reinforced **Stable Bead Technology**.



Durable casing for premium retreadability and enhanced mileage.



Noise-Reducing Tread Design for serene and comfortable travel.



A lifetime of all-weather traction with **Interlocking 3D sipes**.



Embedded with **TPMS Active Sensor Technology**.



Look for the Active Sensor mark located on the tire side wall to identify the new Conti Coach HA3 with Embedded TPMS Sensors.

To get connected with one of our Digital Tire Monitoring Solutions, visit www.continental-truck.com.

Applications: Long haul, over the highway steering and all-position use, for coach and large RV use.

3G Casing	SmartWay Verified	With TPMS Sensor	Retread Available
-----------	-------------------	------------------	-------------------


Conti HSL 3 (Rename of Conti Hybrid HS3)

Fuel Efficient, Super Regional Steer

GOODS PEOPLE CONSTRUCTION



PRODUCT DATA




TIRE SIZE	LOAD RANGE	ARTICLE NUMBER (Conti HSL 3)	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION		
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	SINGLE	DUAL	
					LBS, PSI (KG, KPa)		LBS, PSI (KG, KPa)															
Conti HSL 3	11R22.5	G	05111560000	20	75	195	495	41.6	1056	11.7	296	131	331	8.25, 750	12.5	318	495	308	118	54	6175, 105 (2800, 720)	5840, 105 (2650, 720)
	11R22.5	H	05111570000	20	75	195	495	41.6	1056	11.7	296	131	331	8.25, 750	12.5	318	495	308	119	54	6610, 120 (3000, 830)	6005, 120 (2725, 830)
	295/75R22.5	G	05111580000	20	75	18.7	474	40.0	1017	11.5	292	12.3	313	8.25, 900	12.5	318	518	322	114	52	6175, 110 (2800, 760)	5675, 110 (2575, 760)
	295/75R22.5	H	05111590000	20	75	18.7	474	40.0	1017	11.5	292	12.3	313	8.25, 900	12.5	318	518	322	115	52	7160, 120 (3250, 830)	6610, 120 (3000, 830)
Conti Hybrid HS3	11R22.5	G	05110780000	20	75	195	495	41.6	1056	11.7	296	131	331	8.25, 750	12.5	318	495	308	118	54	6175, 105 (2800, 720)	5840, 105 (2650, 720)
	11R22.5	H	05110790000	20	75	195	495	41.6	1056	11.7	296	131	331	8.25, 750	12.5	318	495	308	119	54	6610, 120 (3000, 830)	6005, 120 (2725, 830)
	295/75R22.5	G	05110950000	20	75	18.7	474	40.0	1017	11.5	292	12.3	313	8.25, 900	12.5	318	518	322	114	52	6175, 110 (2800, 760)	5675, 110 (2575, 760)
	295/75R22.5	H	05110960000	20	75	18.7	474	40.0	1017	11.5	292	12.3	313	8.25, 900	12.5	318	518	322	115	52	7160, 120 (3250, 830)	6610, 120 (3000, 830)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.




Increased stiffness in the **belt package** promotes smooth, even tread wear.



Advanced tread compounding delivers long removal mileage and low rolling resistance.



Fuel Saving Edge technology designed to increase fuel efficiency and application flexibility.



Built on the **Conti 3G Casing** for maximum retreadability.

Applications: Over the road super regional steer and all position use.


Legend:

 3G Casing	 SmartWay Verified	 With TPMS Sensor	 Retread Available
--	--	---	--

HDL2

Fuel Efficient, Long Haul Drive

 GOODS  PEOPLE  CONSTRUCTION

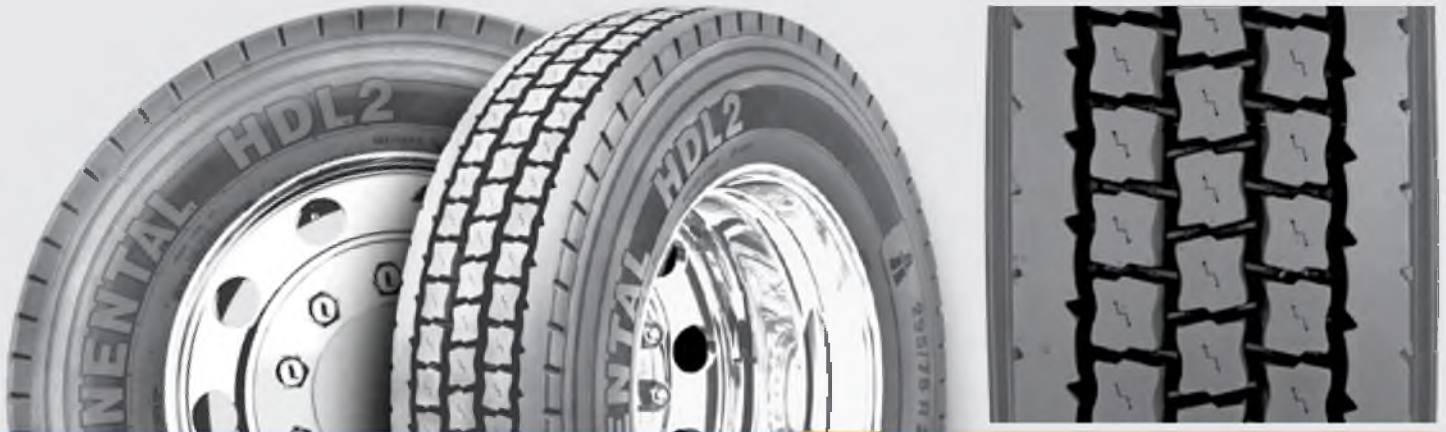

PRODUCT DATA



TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)
11R22.5	G	05211220000	26	75	196	499	42.0	1066	11.7	296	131	331	8.25, 750	12.5	318	493	306	130	59	6175, 105 (2800, 720)	5840, 105 (2650, 720)
11R22.5	H	05211230000	26	75	196	499	42.0	1066	11.7	296	131	331	8.25, 750	12.5	318	493	306	130	59	6610, 120 (3000, 830)	6005, 120 (2725, 830)
295/75R22.5	G	05211180000	26	75	18.9	481	40.5	1029	11.5	292	12.9	328	8.25, 900	12.5	318	511	318	122	55	6175, 110 (2800, 760)	5675, 110 (2575, 760)
295/75R22.5	H	05211210000	26	75	18.9	481	40.5	1029	11.5	292	12.9	328	8.25, 900	12.5	318	511	318	122	55	6940, 120 (3150, 830)	6395, 120 (2900, 830)
11R24.5	G	05211240000	26	75	20.5	521	44.0	1118	11.7	296	131	331	8.25, 750	12.5	318	470	292	141	63	6610, 105 (3000, 720)	6005, 105 (2725, 720)
11R24.5	H	05211250000	26	75	20.5	521	44.0	1118	11.7	296	131	331	8.25, 750	12.5	318	470	292	141	63	7160, 120 (3250, 830)	6610, 120 (3000, 830)
285/75R24.5	G	05211260000	26	75	19.5	495	41.9	1063	11.5	292	12.9	328	8.25	12.5	318	494	307	128	58	6175, 110 (2800, 760)	5675, 110 (2575, 760)
285/75R24.5	H	05211310000	26	75	19.5	495	41.9	1063	11.5	292	12.9	328	8.25	12.5	318	494	307	128	58	6780, 120 (3075, 830)	6175, 120 (2800, 830)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. * - ECE Certified. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC. reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



Advanced tread compounding for maximum fuel efficiency.



Innovative groove geometry minimizes stone retention.



Built on the Conti 3G Casing for maximum retreadability.

Applications: Long haul over the road drive positions.

Legend:

 3G Casing	 SmartWay Verified	 With TPMS Sensor	 Retread Available
--	--	---	--

HDL2 Eco Plus

Fuel Efficient, Super Single Drive

GOODS PEOPLE CONSTRUCTION



PRODUCT DATA



TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIMS)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	SINGLE	DUAL
					LBS, PSI (KG, KPa)		LBS, PSI (KG, KPa)														
445/50R22.5*	L	05210130000	27	75	18.8	478	40.4	1027	17.5	445	19.2	488	14.00	N/A	N/A	512	318	200	91	10200, 120 (4625, 830)	N/A

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains * - ECE Certified # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



Advanced tread compound with super single weight reduction provides lower rolling resistance.







Features 27/32" tread depth, an **evolving sipe tread design** and closed shoulder.

Groove geometry designed with stress reduction elements to separate forces and reduce premature wear.

3-dimensional center sipes increase groove strength for longevity, while allowing more tread block flexibility.

Applications: Long haul, over the highway drive position.

Legend:

 3G Casing	 SmartWay Verified	 With TPMS Sensor	 Retread Available
---	---	--	---

HDL2+ Eco Plus

Fuel Efficient, Long Haul Drive for Car Carriers

✓ GOODS ● PEOPLE ● CONSTRUCTION



PRODUCT DATA



TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	SINGLE	DUAL
					LBS, PSI (KG, KPa)		LBS, PSI (KG, KPa)														
295/60R22.5*	J	05211410000	24	75	171	434	370	940	115	292	12.0	304	9.00, 9.75	12.9	329	574	356	116	53	7390, 130 (3350, 900)	6780, 130 (3075, 900)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS


Note - Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. * - ECE Certified # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



Advanced tread compound provides extended original mileage and improved rolling resistance.



Closed shoulder tread design provides even tread wear while still providing excellent traction.



Patented innovative groove technology leads to minimal stone retention, extending casing life.



Offers large capacity and car carrier trucks the ability to **carry more weight without sacrificing vehicle height.**

Applications: Long haul and over the highway drive, for large capacity trucks or car carriers.

Legend:

 3G Casing	 SmartWay Verified	 With TPMS Sensor	 Retread Available
---	---	--	---


HDL2 DL

Long Haul Drive, Deep Lug

GOODS PEOPLE CONSTRUCTION



PRODUCT DATA



TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	SINGLE	DUAL
					LBS, PSI (KG, KPa)		LBS, PSI (KG, KPa)														
11R22.5*	G	05686240000	32	75	19.7	501	42.2	1071	11.6	294	13.0	329	8.25, 750	12.5	318	491	305	138	63	6175, 105 (2800, 720)	5840, 105 (2650, 720)
11R22.5*	H	05687030000	32	75	19.7	501	42.2	1071	11.6	294	13.0	329	8.25, 750	12.5	318	491	305	139	63	6610, 120 (3000, 830)	6005, 120 (2725, 830)
275/80R22.5*	G	05686270000	32	75	19.1	485	40.8	1036	11.4	289	12.7	323	8.25, 750	12.5	318	507	315	133	60	6175, 110 (2800, 760)	5675, 110 (2575, 760)
11R245*	G	05686250000	32	75	20.7	526	44.2	1122	11.6	295	13.0	330	8.25, 750	12.5	318	468	291	148	67	6610, 105 (3000, 830)	6005, 105 (2725, 720)
11R245*	H	05686260000	32	75	20.7	526	44.2	1122	11.6	295	13.0	330	8.25, 750	12.5	318	468	291	149	68	7160, 120 (3250, 830)	6610, 120 (3000, 830)
285/75R245*	G	05686280000	32	75	19.7	501	42.2	1073	11.4	290	12.6	321	8.25	12.5	318	490	305	136	62	6175, 110 (2800, 760)	5675, 110 (2575, 760)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. * - ECE Certified Minimum Dual Spacing calculated without chains. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



32/32" tread depth provides high mileage and low cost per mile.



Patented innovative groove technology leads to minimal stone retention, extending casing life.



Minimized wear and excellent traction over the life of the tire, through a **wide, closed shoulder tread and numerous tread blocks** with multiple grip edges.



Built on the **Conti 3G Casing** for maximum retreadability.

Superior casing construction allows high air dispersion for improved durability and enhanced retreadability.

Applications: Long haul, over the highway drive position.

Legend:

 3G Casing	 SmartWay Verified	 With TPMS Sensor	 Retread Available
---	---	--	---


HDL2 DL Eco Plus

Fuel Efficient, Long Haul Drive, Deep Lug

GOODS PEOPLE CONSTRUCTION




PRODUCT DATA



TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIMS	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)
					SINGLE		DUAL														
11R22.5*	G	05211100000	32	75	19.7	501	42.2	1071	11.6	294	13.0	329	8.25, 750	12.5	318	491	305	138	63	6175, 105 (2800, 720)	5840, 105 (2650, 720)
275/80R22.5*	G	05210120000	32	75	191	485	40.8	1036	11.4	289	12.7	323	8.25, 750	12.5	318	507	315	133	60	6175, 110 (2800, 760)	5675, 110 (2575, 760)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. * - ECE Certified # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



Advanced tread compounding provides this Eco Plus version with 33% less rolling resistance than the original HDL2 DL.



32/32" tread depth provides high mileage and low cost per mile.



Patented innovative groove technology leads to minimal stone retention, extending casing life.



Minimized wear and excellent traction over the life of the tire, through a **wide, closed shoulder tread and numerous tread blocks** with multiple grip edges.



Built on the **Conti 3G Casing** for maximum retreadability.

Applications: Long haul, over the highway drive position.

Legend:

 3G Casing	 SmartWay Verified	 With TPMS Sensor	 Retread Available
--	--	---	--

HDL Eco Plus

Fuel Efficient, Long Haul Drive

GOODS PEOPLE CONSTRUCTION




PRODUCT DATA



TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	SINGLE	DUAL
					LBS, PSI (KG, KPa)		LBS, PSI (KG, KPa)														
11R22.5*	G	05682990000	28	75	196	498	42.0	1066	11.1	282	12.1	307	8.25, 750	12.5	318	493	306	127	58	6175, 105 (2800, 720)	5840, 105 (2650, 720)
275/80R22.5*	G	05683980000	28	75	18.9	480	40.8	1036	11.0	279	12.1	307	8.25, 750	12.5	318	509	315	119	54	6175, 110 (2800, 760)	5675, 110 (2575, 760)
275/80R22.5*	H	05683770000	28	75	18.9	480	40.8	1036	11.0	279	12.1	307	8.25, 750	12.5	318	509	315	119	54	6940, 120 (3150, 830)	6175, 120 (2800, 830)
11R24.5*	H	05683760000	28	75	20.6	523	44.0	1117	11.1	282	12.1	307	8.25, 750	12.5	318	470	292	136	62	7160, 120 (3250, 830)	6610, 120 (3000, 830)
285/75R24.5*	H	05683780000	28	75	19.6	498	42.0	1066	10.7	272	12.1	307	8.25, 750	12.5	318	493	306	128	58	6780, 120 (3075, 830)	6175, 120 (2800, 830)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. * - ECE Certified. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC. reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



Advanced tread compound provides long original mileage and low rolling resistance.



Closed shoulder tread design provides even tread wear while still providing excellent traction.




Stone ejection system reduces stone retention and casing penetrations.



28/32" tread depth for optimized mileage and rolling resistance.

Applications: Long haul, over the highway, drive position.

 3G Casing	 SmartWay Verified	 With TPMS Sensor	 Retread Available
--	--	---	--

Conti Eco Plus HT3

Fuel Efficient, Long Haul Trailer

GOODS ● PEOPLE ● CONSTRUCTION



PRODUCT DATA



TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIMS	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)
11R22.5	G	05310280000	13	75	19.2	488	41.2	1046	11.7	297	131	331	8.25, 750	12.5	318	502	312	116	53	6175, 105 (2800, 720)	5840, 105 (2650, 720)
11R22.5	H	05310310000	13	75	19.2	488	41.2	1046	11.7	297	131	331	8.25, 750	12.5	318	502	312	117	53	6610, 120 (3000, 830)	6005, 120 (2725, 830)
255/70R22.5	H	05310340000	18	75	171	434	36.6	929	9.9	251	10.8	274	750, 8.25	11.3	287	566	352	95	43	5510, 120 (2500, 830)	5070, 120 (2300, 830)
295/75R22.5	G	05310270000	13	75	18.5	470	39.7	1008	11.5	292	12.9	328	8.25, 900	12.5	318	522	324	108	49	6175, 110 (2800, 760)	5675, 110 (2575, 760)
11R24.5	G	05310260000	13	75	20.1	511	43.2	1097	11.7	296	131	331	8.25, 750	12.5	318	479	298	121	54	6610, 105 (3000, 720)	6005, 105 (2725, 720)
11R24.5	H	05310350000	13	75	20.1	511	43.2	1097	11.7	296	131	331	8.25, 750	12.5	318	479	298	122	55	7160, 120 (3250, 830)	6610, 120 (3000, 830)
285/75R24.5	G	05310250000	13	75	191	485	411	1044	11.5	292	12.9	329	8.25	12.5	318	504	313	112	51	6175, 110 (2800, 760)	5675, 110 (2575, 760)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



Advanced tread compound and optimized tread design provide exceptional mileage.

Ultra low rolling resistant trailer tire delivers outstanding fuel efficiency in long haul applications.






Built on the **Conti 3G Casing** for maximum retreadability.



Improved sidewall construction for defense against curbing, cuts and abrasions.

Applications: Trailers and free rolling positions.

Legend:

 3G Casing	 SmartWay Verified	 With TPMS Sensor	 Retread Available
--	--	---	--

HTL1

Fuel Efficient, Super Single Trailer

 GOODS  PEOPLE  CONSTRUCTION



PRODUCT DATA



TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION			
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	IN	MM	MI	KM	LB	KG	SINGLE	DUAL
					LBS, PSI (KG, KPa)		LBS, PSI (KG, KPa)																
445/50R22.5*	L	05310000000	13	75	181	460	39.2	996	17.3	439	19.0	483	14.00	N/A	N/A	528	328	174	79	10200, 120 (4625, 830)	N/A		

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

* - ECE Certified # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



13/32" tread depth minimizes irregular wear.







Shoulder defense groove provides protection against rapid shoulder wear.



Patented innovative groove technology leads to minimum stone retention, extending casing life.

Applications: Super single fitment for long haul, trailer position in highway service.

Legend:

			
3G Casing	SmartWay Verified	With TPMS Sensor	Retread Available

HTL2 Eco Plus

Fuel Efficient, Long Haul Trailer

GOODS PEOPLE CONSTRUCTION



PRODUCT DATA



TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIMS	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)
215/75R175	J	05310170000	15	75	141	359	30.4	772	8.5	215	91	231	6.00, 6.75	9.5	242	681	423	61	28	4805, 125 (2180, 860)	4540, 125 (2060, 860)
235/75R175	J	05310180000	13	75	145	369	31.6	802	9.2	234	10.0	254	6.75, 7.50	10.6	269	656	407	65	29	6005, 125 (2725, 860)	5675, 125 (2575, 860)
245/70R175	J	05310190000	13	75	145	369	31.6	802	9.2	234	100	254	6.75, 7.50	10.6	269	656	407	65	29	6005, 125 (2725, 860)	5675, 125 (2575, 860)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



Low rolling resistance compound provides excellent fuel economy at cool operating temperatures.



Advanced tread design provides long original mileage and low cost per mile.



Heavy ply construction for structural durability in large capacity applications.



Patented groove technology leads to minimum stone retention, extending casing life.

Innovative groove geometry promotes efficient water evacuation, traction and wet braking capabilities throughout tire life.

Applications: Heavy haul and long haul trailer positions.

Long Haul Retread Product Overview

For Long Distance Highway Driving

Legend:



SmartWay Verified



New Tire Available



HDL2 DL



HDL2 DL Eco Plus



HDL



HDL Eco Plus



HDL2 Eco Plus



Eco Plus HT3



HTL Eco Plus




HTL





HTL1





ContiTread HDL2 DL | Long Haul Drive, Deep Lug





PRODUCT DATA				
WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)		
215	18207130000	28		
225	18207140000	28		
235	18207150000	28		
245	18208190000	28		
260	18209420000	28		

- Optimized compound with ultra deep tread delivers high mileage.
- Minimized wear and excellent traction over the life of the tire through a wide, closed shoulder tread and numerous tread blocks with multiple grip edges.
- Patented innovative groove technology leads to minimum stone retention, extending casing life.

ContiTread HDL2 DL Eco Plus | Fuel Efficient, Long Haul Drive, Deep Lug





PRODUCT DATA				
WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)		
215	18208070000	28		
225	18208080000	28		
235	18208090000	28		
245	18208100000	28		

- Advanced, fuel efficient compound provides long original mileage and rolling resistance.
- Minimized wear and excellent traction over the life of the tire through a wide, closed shoulder tread and numerous tread blocks with multiple grip edges.
- Patented innovative groove technology leads to minimum stone retention, extending casing life.


ContiTread HDL | Long Haul Drive



PRODUCT DATA				
WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)		
215	18208240000	26		
225	18208250000	26		
235	18208260000	26		
245	18208310000	26		
215	18208270000	20		
225	18208280000	20		
235	18208290000	20		
245	18208300000	20		
200	18207920000	13		
215	18207930000	13		
225	18313000000	13		
235	18206260000	13		



- Cut and tear resistant tread compound for excellent wear.
- Closed shoulder tread design provides even tread wear while still providing excellent traction.
- Patented innovative groove technology leads to minimum stone retention, extending casing life.

Legend:

	
SmartWay Verified	New Tire Available

ContiTread HDL Eco Plus | Fuel Efficient, Long Haul Drive





PRODUCT DATA				
WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)		
215	18204820000	26		
225	18204830000	26		
235	18204840000	26		
245	18204850000	26		
215	18204860000	20		
225	18204870000	20		
235	18204880000	20		
245	18204890000	20		

- Advanced, fuel efficient compound provides long original mileage and rolling resistance.
- Closed shoulder tread design provides even tread wear while still providing excellent traction.
- Patented innovative groove technology leads to minimum stone retention, extending casing life.

ContiTread HDL2 Eco Plus | Fuel Efficient, Super Single Drive





PRODUCT DATA				
WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)		
390	18209240000	24		
400	18206780000	24		

- Super single drive tire with advanced compounding for low rolling resistance and high mileage.

ContiTread Eco Plus HT3 | Fuel Efficient, Long Haul Trailer





PRODUCT DATA				
WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)		
215	18208620000	13		
225	18208630000	13		
235	18208640000	13		
245*	18208650000	13		

- Ultra low rolling resistant compounding.
- Optimized tread pattern resists irregular wear.
- 13/32nd tread depth for high removal mileage.
- Fuel Saving Edge technology available in 245mm tread width for maximum fuel efficiency.*


ContiTread HTL Eco Plus | Fuel Efficient, Long Haul Trailer



PRODUCT DATA				
WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)		
200	18208600000	13		
210	18204900000	13		
220	18204910000	13		
230	18204920000	13		
240	18206830000	13		

- Advanced, fuel efficient compound provides long original mileage and rolling resistance.
- 13/32" tread depth minimizes tread squirm and irregular wear.
- Patented innovative groove technology leads to minimum stone retention, extending casing life.

Legend:




ContiTread HTL | Long Haul Trailer



PRODUCT DATA		
WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
200	18208720000	13
210	18205420000	13
220	18205440000	13
230	18205460000	13
240	18206800000	13

- 13/32" tread depth minimizes tread squirm and irregular wear.
- Patented innovative groove technology leads to minimum stone retention, extending casing life.

ContiTread HTL1 | Fuel Efficient, Super Single Trailer



PRODUCT DATA		
WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
390	18214670000	13
400	18214680000	13
410	18214690000	13

- Optimized compound for regional and long hauling delivers high mileage.
- Proven 13/32" tread design.
- New solid shoulder design for durability.
- Patented innovative groove technology leads to minimum stone retention, extending casing life.

TrukFix

Continental's Roadside Assistance Program

Quick, Professional Help

Our trained dispatchers are available 24/7. You'll receive fast expert roadside assistance whenever you need it. Real time incident tracking is provided until your truck is back on the road.

Automatic Enrollment, No Membership Fees

TRUKFIX is a free service for Continental's qualified National Accounts and Premier Fleet members. No sign ups, membership cards, or waiting periods once you become a Continental National Account or Premier Fleet member.



Predictable Pricing & Convenient Billing

You'll receive consistent nationwide pricing on Continental and General Tire brand tires, taking the guesswork out of roadside costs. TrukFix offers convenient billing for qualified* accounts through our National Account invoicing process.

Convenient credit card payments are required for Premier Fleet members

Unparalleled Service

Our professionally-trained dispatchers stay in contact until the vehicle is back on the road. Every call is monitored, and a follow-up call is made the next day to ensure the repairs are satisfactory.

877-TRUKFIX - 24/7 EMERGENCY HOTLINE



Better Customer Service

One call to our emergency hotline, 877-TRUKFIX, triggers our North American network of service providers who stock Continental and General Tire truck products. Use our Dealer Locator app to reach us with just a tap of your screen.



Better Communication

Each case is managed with coordinated and documented support. We stay in contact until the truck is back in service. The next day, a follow-up call is made to ensure you are satisfied.



Better Pricing

We provide service to Continental Tire National Accounts and Premier Fleet members. With our no membership fee policy, you pay only when you use the service. TrukFix is a regulated and published pricing tire and service program. Conveniently billed through our National Account invoicing system.





Regional For Highway & Local Driving

Long Removal Mileage // Cut/Chip Resistance // Resistance to High Scrub // Robust Casing Construction

Engineered for your application. Tires for Regional use are designed for applications where vehicles spend the majority of their time on pavement with multiple stops through inter-city operations, and mostly paved roads. Tires are optimized for high scrub, cut-chip resistance applications, as well as traction.

IMPORTANT NOTE: Tire Products are now classified by route. Product details are subject to change, please visit our website or contact your local sales representative for the most up to date information.



 3G Casing	 SmartWay Verified	 With TPMS Sensor	 Retread Available
--	--	---	--

Regional

Truck Tire Product Overview

REGIONAL



Conti HSR 3
 3G   
 (Rename of Conti CrossTrac HA3)



HSR2
 3G   



HSR2 Eco Plus
 3G   



HSR2 SA
 3G   



Conti LAR 3
 3G   



HTR2
 3G   



LSR1
 3G   



HDR2
 3G   



HDR2 Eco Plus
 3G   



Conti Hybrid HD3
 3G   






HDR
 3G   



HDW2
 3G   

Legend:

 3G Casing	 SmartWay Verified	 With TPMS Sensor	 Retread Available
--	--	---	--

Regional (Continued)

Truck Tire Product Overview



Conti Hybrid HT3
3G   



HTR2 - 17.5"
3G   



Conti Hybrid HS3 - 19.5"
3G   



HSR - 19.5"
3G   



Conti Hybrid HD3 - 19.5"
3G   




HDR - 19.5"
3G   



Conti Scandinavia HD3 - 19.5"
3G   



Conti Hybrid HT3 - 19.5"
3G   



Conti HSR 3 (Rename of Conti CrossTrac HA3)

Regional All-Position

GOODS PEOPLE CONSTRUCTION



PRODUCT DATA



	TIRE SIZE	LOAD RANGE	ARTICLE NUMBER (Conti HSL 3)	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
						IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)
																						SINGLE
Conti HSR 3	11R22.5	G	05124370000	23	75	195	495	41.9	1064	11.6	295	13.0	330	8.25, 750	12.5	318	494	307	131	59	6175, 105 (2800, 720)	5840, 105 (2650, 720)
	11R22.5	H	05124380000	23	75	195	495	41.9	1064	11.6	295	13.0	330	8.25, 750	12.5	318	494	307	133	61	6610, 120 (3000, 830)	6005, 120 (2725, 830)
	12R22.5	H	05124390000	23	75	20.2	513	42.8	1086	11.9	302	131	333	900, 8.25	13.7	348	484	301	144	65	7390, 120 (3350, 830)	6780, 120 (3075, 830)
	295/75R22.5	G	05124400000	23	75	18.9	480	40.2	1022	11.8	299	12.9	328	8.25, 750	13.4	340	514	320	121	55	6175, 110 (2800, 760)	5675, 110 (2575, 760)
	295/75R22.5	H	05124410000	23	75	18.9	480	40.2	1022	11.8	299	12.9	328	8.25, 750	13.4	340	514	320	126	57	7160, 120 (3250, 830)	6610, 120 (3000, 830)
	11R24.5	G	05124420000	23	75	20.5	521	43.8	1113	11.6	295	13.0	330	8.25, 750	12.5	318	473	294	140	63	6610, 105 (3000, 720)	6005, 105 (2725, 720)
	11R24.5	H	05124430000	23	75	20.5	521	43.8	1113	11.6	295	13.0	330	8.25, 750	12.5	318	473	294	143	65	7160, 120 (3250, 830)	6610, 120 (3000, 830)
Conti CrossTrac HA3	11R22.5	G	05153120000	23	75	195	495	41.9	1064	11.6	295	13.0	330	8.25, 750	12.5	318	494	307	131	59	6175, 105 (2800, 720)	5840, 105 (2650, 720)
	11R22.5	H	05153150000	23	75	195	495	41.9	1064	11.6	295	13.0	330	8.25, 750	12.5	318	494	307	133	61	6610, 120 (3000, 830)	6005, 120 (2725, 830)
	12R22.5	H	05153190000	23	75	20.2	513	42.8	1086	11.9	302	131	333	900, 8.25	13.7	348	484	301	144	65	7390, 120 (3350, 830)	6780, 120 (3075, 830)
	295/75R22.5	G	05153220000	23	75	18.9	480	40.2	1022	11.8	299	12.9	328	8.25, 750	13.4	340	514	320	121	55	6175, 110 (2800, 760)	5675, 110 (2575, 760)
	295/75R22.5	H	05153230000	23	75	18.9	480	40.2	1022	11.8	299	12.9	328	8.25, 750	13.4	340	514	320	126	57	7160, 120 (3250, 830)	6610, 120 (3000, 830)
	11R24.5	G	05153170000	23	75	20.5	521	43.8	1113	11.6	295	13.0	330	8.25, 750	12.5	318	473	294	140	63	6610, 105 (3000, 720)	6005, 105 (2725, 720)
	11R24.5	H	05153180000	23	75	20.5	521	43.8	1113	11.6	295	13.0	330	8.25, 750	12.5	318	473	294	143	65	7160, 120 (3250, 830)	6610, 120 (3000, 830)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



Rigid belt package with full width top belt and extra sidewall protection for increased durability.



Zigzag center groove geometry increases the number of biting edges for increased traction.



Pyramidal stone ejection system for maximum casing protection.



Built on the innovative **Conti 3G Casing** for maximum retreadability.

Applications: Regional hauling and on/off road, all-position.

Legend:

 3G Casing	 SmartWay Verified	 With TPMS Sensor	 Retread Available
--	--	---	--

HSR2

Regional All-Position

 GOODS  PEOPLE  CONSTRUCTION



REGIONAL

PRODUCT DATA




TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIMS	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	SINGLE	DUAL
					LBS, PSI (KG, KPa)		LBS, PSI (KG, KPa)														
10R22.5	G	05686570000	20	75	18.8	478	40.0	1016	10.0	254	10.8	274	7.50, 6.75, 8.25	11.4	290	518	322	105	48	5675, 115 (2575, 790)	5355, 115 (2430, 790)
11R22.5*	G	05686300000	23	75	19.4	493	41.6	1057	11.1	282	12.0	305	8.25	12.5	318	498	309	121	55	6175, 105 (2800, 720)	5840, 105 (2650, 720)
11R22.5*	H	05686310000	23	75	19.4	493	41.6	1057	11.1	282	12.0	305	8.25	12.5	318	498	309	122	55	6610, 120 (3000, 830)	6005, 120 (2725, 830)
12R22.5	H	05120880000	23	75	20.1	511	42.9	1090	11.4	290	12.1	306	9.00, 8.25	13.5	343	482	300	133	60	7390, 120 (3350, 830)	6780, 120 (3075, 830)
275/80R22.5*	H	05686350000	23	75	18.6	472	40.0	1016	11.1	282	12.6	320	8.25	12.5	318	518	322	117	53	7160, 120 (3250, 830)	6610, 120 (3000, 830)
11R24.5*	H	05686330000	23	75	20.4	518	43.5	1105	11.1	282	12.0	305	8.25	12.5	318	476	296	130	59	7160, 120 (3250, 830)	6610, 120 (3000, 830)
285/75R24.5*	H	05687020000	23	75	19.4	493	41.3	1049	10.7	272	12.1	307	8.25	12.5	318	501	311	121	55	6780, 120 (3075, 830)	6175, 120 (2800, 830)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS


Note - Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. * - ECE Certified. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



23/32" deep **improved cut and chip resistant tread compound** for optimal performance.

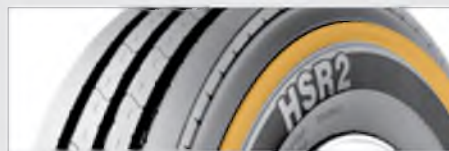

Protective curb rib for high scrub applications.

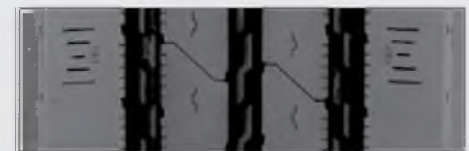




Patented innovative groove technology leads to minimum stone retention, extending casing life.

Patented groove geometry for better resistance to cracking and tearing.

Applications: Regional hauling and on/off road, all-position.

Legend:

			
3G Casing	SmartWay Verified	With TPMS Sensor	Retread Available

HSR2 Eco Plus

Fuel Efficient, Regional Steer

 GOODS  PEOPLE  CONSTRUCTION



REGIONAL

PRODUCT DATA



TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	SINGLE	DUAL
					LBS, PSI (KG, KPa)		LBS, PSI (KG, KPa)														
275/80R22.5*	H	05120850000	23	75	18.7	475	40.0	1016	11.1	282	12.6	320	8.25, 7.50	12.5	318	518	322	117	53	7160, 120 (3250, 830)	6610, 120 (3000, 830)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. * - ECE Certified # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. 315/80R22.5 tires used on 8.25" rims are restricted to a maximum of 7610 lbs at 120 psi. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



Advanced tread compounding provides this Eco Plus version with **20% less rolling resistance** than the original HSR2.

23/32" deep **rolling resistant tread compound** for long tread life on highway and regional road combined applications.



Sidewall with curb rib reduces damage from curbing, cuts and abrasions.



Patented innovative groove technology leads to minimum stone retention, extending casing life.

Large radial grooves for improved resistance to groove cracking.

Applications: On highway and regional hauling, all-position.

Legend:

 3G Casing	 SmartWay Verified	 With TPMS Sensor	 Retread Available
--	--	---	--

HSR2 SA

Regional All-Position

 GOODS  PEOPLE  CONSTRUCTION



REGIONAL

PRODUCT DATA



TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIMS)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	SINGLE	DUAL
					LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)															
255/70R22.5*	H	05122460000	18	75	171	434	366	930	10.0	255	10.8	274	8.25, 750	11.3	287	565	351	91	41	5510, 120 (2500, 830)	5070, 120 (2300, 830)
275/70R22.5*	J	05121290000	18	75	178	451	379	962	10.7	272	11.6	295	8.25	12.4	315	547	340	115	52	6940, 130 (3150, 900)	6395, 130 (2900, 900)
295/80R22.5*	H	05123900000	20	81	19.3	490	41.4	1052	11.8	300	13.2	335	9.00, 8.25	12.5	318	500	311	138	63	7830, 120 (3550, 830)	6940, 120 (3150, 830)
315/80R22.5 *	L	05120980000	19	75	19.8	503	42.5	1080	12.5	317	12.5	317	9.00, 8.25	13.8	351	487	303	143	65	9090, 130 (4125, 900)	8270, 130 (3750, 900)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. * - ECE Certified # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. 315/80R22.5 tires used on 8.25" rims are restricted to a maximum of 7610 lbs at 120 psi. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



Maximum tire life expectancy and wet traction capabilities through **customized tread geometry**.




Superb wet traction capabilities with minimum wear through innovative tread compound.



Ideal for buses and larger recreational vehicles.

Applications: Steer or all-position regional/long haul, for bus or large RV traffic.

Legend:



Conti LAR 3

16" Regional All-Position with Steel Casing

GOODS PEOPLE CONSTRUCTION



PRODUCT DATA



TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION			
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	IN	MM	MI	KM	LB	KG	SINGLE	DUAL
					LBS, PSI (KG, KPa)		LBS, PSI (KG, KPa)																
LT225/75R16	E	04120950000	14	93	13.9	352	29.7	754	8.9	225	9.5	242	6.00	10.0	254	697	433	52	23	2680, 80 (1215, 550)	2470, 80 (1120, 550)		
LT235/85R16	E	04120960000	14	93	14.4	366	30.9	786	9.9	251	10.6	270	7.00	11.0	279	669	416	56	25	3085, 80 (1400, 550)	2755, 80 (1250, 550)		
LT245/75R16	E	04120970000	14	93	14.4	366	30.9	786	9.9	251	10.6	270	7.00	11.0	279	669	416	56	25	3085, 80 (1400, 550)	2755, 80 (1250, 550)		

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. * - ECE Certified # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



All steel radial designed for outstanding durability and maximum retreadability.



Specialized compounding delivers outstanding mileage while still providing excellent fuel efficiency.



10 ply light truck all steel casing provides increased load carrying capacity, durability and puncture resistance.




Applications: Regional haul, all-position.

Legend:

 3G Casing	 SmartWay Verified	 With TPMS Sensor	 Retread Available
---	---	--	---

HTR2

Regional All-Position

 GOODS  PEOPLE  CONSTRUCTION



REGIONAL

PRODUCT DATA



TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIMS	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	IN	MM	MI	KM	LB	KG
385/65R22.5	L	05320080000	21	68	19.5	495	42.0	1067	14.8	376	16.3	414	11.75, 12.25	N/A	N/A	493	306	165	75	9920, 130 (4500, 900)	N/A
425/65R22.5	L	05320260000	21	68	20.3	515	44.3	1126	16.6	422	18.0	457	13.00, 14.00, 12.15	N/A	N/A	467	290	181	82	11400, 120 (5150, 830)	N/A

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. These specifications subject to change without notice. * - ECE Certified. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



High mileage achieved through precise balance of compound and tread geometry.



Tread pattern designed for increased stability and reduced noise.



Increased fuel efficiency due to optimized tread pattern and reduced tire weight.



Patented innovative groove technology leads to minimum stone retention, extending casing life.




Applications: Local and long haul, all-position service.

Legend:

 3G Casing	 SmartWay Verified	 With TPMS Sensor	 Retread Available
--	--	---	--

LSR1

17.5" Regional All-Position

 GOODS  PEOPLE  CONSTRUCTION



PRODUCT DATA



TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	SINGLE	DUAL
					LBS, PSI (KG, KPa)		LBS, PSI (KG, KPa)														
10R175*	H	04120910000	17	75	15.7	398	33.8	858	10.0	254	10.3	262	750, 675	11.3	286	613	381	70	32	4675, 115 (2120, 790)	4410, 115 (2000, 790)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. * - ECE Certified. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



Multi-rib tread design features excellent wet traction, lateral stability and reduced noise.







Patented innovative groove technology leads to minimum stone retention, extending casing life.



Advanced tread compound provides long original mileage in regional applications.

Applications: Regional and urban all-position use.

Legend:

 3G Casing	 SmartWay Verified	 With TPMS Sensor	 Retread Available
---	---	--	---

HDR2

Regional Drive

 GOODS  PEOPLE  CONSTRUCTION



*TREAD B

PRODUCT DATA



TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIMS)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	SINGLE	DUAL
					LBS, PSI (KG, KPa)		LBS, PSI (KG, KPa)														
10R22.5	G	05221450000	24	75	19.0	483	40.4	1026	10.0	254	11.0	278	7.50, 6.75, 8.25	11.4	290	513	318	109	49	5675, 115 (2575, 790)	5355, 115 (2430, 790)
11R22.5	G	05220410000	30	75	19.8	502	42.2	1071	11.6	295	13.0	330	8.25, 7.50	12.5	318	491	305	136	61	6175, 105 (2800, 720)	5840, 105 (2650, 720)
11R22.5	H	05220420000	30	75	19.8	502	42.2	1071	11.6	295	13.0	330	8.25, 7.50	12.5	318	491	305	137	62	6610, 120 (3000, 830)	6005, 120 (2725, 830)
12R22.5	H	05221270000	30	75	20.3	515	43.2	1098	11.9	301	13.2	335	9.00, 8.25	13.5	343	497	298	148	67	7390, 120 (3350, 830)	6780, 120 (3075, 830)
295/75R22.5	G	05220440000	30	75	19.0	483	40.7	1034	11.5	292	12.9	328	8.25, 9.00	12.5	318	509	316	128	58	6175, 110 (2800, 760)	5675, 110 (2575, 760)
295/75R22.5	H	05220450000	30	75	19.0	483	40.7	1034	11.5	292	12.9	328	8.25, 9.00	12.5	318	509	316	129	58	7160, 120 (3250, 830)	6610, 120 (3000, 830)
11R24.5	H	05220430000	30	75	20.6	524	44.2	1123	11.6	295	13.0	330	8.25, 7.50	12.5	318	468	291	147	66	7160, 120 (3250, 830)	6610, 120 (3000, 830)
285/75R24.5	H	05220470000	30	75	19.6	498	42.1	1069	11.5	292	12.9	328	8.25	12.5	318	492	306	135	61	6780, 120 (3075, 830)	6175, 120 (2800, 830)
315/80R22.5* (Tread B)	L	05223660000	28	75	19.7	500	43.1	1096	12.3	312	12.5	318	9.00, 9.75	13.8	351	491	305	152	69	9090, 130 (4125, 900)	8270, 130 (3750, 900)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. * - ECE Certified # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 01 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. 315/80R22.5 tires used on 8.25" rims are restricted to a maximum of 7610 lbs at 120 psi. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



Exceptional removal mileage and all-weather traction provided by **wide, open shoulder tread design**.

Optimized contour and **balanced footprint distribution** for extended tread life and product performance.






Chamfered tread block geometry to withstand higher drive axle torque with reduced drive tire wear conditions such as tearing and cracking.



Built on the **Conti 3G casing** for maximum retreadability.




Applications: Regional and long haul drive positions. On/Off highway service.

Legend:

 3G Casing	 SmartWay Verified	 With TPMS Sensor	 Retread Available
--	--	---	--

HDR2 Eco Plus

Fuel Efficient, Regional Drive

 GOODS  PEOPLE  CONSTRUCTION



PRODUCT DATA



TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIMS)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	SINGLE	DUAL
					LBS, PSI (KG, KPa)		LBS, PSI (KG, KPa)														
11R22.5	G	05221540000	30	75	19.8	502	42.2	1071	11.6	295	13.0	330	8.25, 750	12.5	318	491	305	136	61	6175, 105 (2800, 720)	5840, 105 (2650, 720)
295/75R22.5	G	05220650000	30	75	19.0	482	40.7	1034	11.5	292	12.9	328	8.25, 900	12.5	318	509	316	128	58	6175, 110 (2800, 760)	5675, 110 (2575, 760)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. * - ECE Certified # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. 315/80R22.5 tires used on 8.25" rims are restricted to a maximum of 7610 lbs at 120 psi. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



Advanced tread compounding provides this Eco Plus version with **20% less rolling resistance** than the HDR2.



30/32" tread is compounded for low rolling resistance with long tread life used on highway and regional roads.



Open shoulder tread design provides excellent wet/dry traction while resisting irregular wear.



Built on the **Conti 3G casing** for maximum retreadability.

Applications: Drive position, regional hauling on highway service.


Legend:

 3G Casing	 SmartWay Verified	 With TPMS Sensor	 Retread Available
--	--	---	--

Conti Hybrid HD3

Super Regional Drive

GOODS PEOPLE CONSTRUCTION

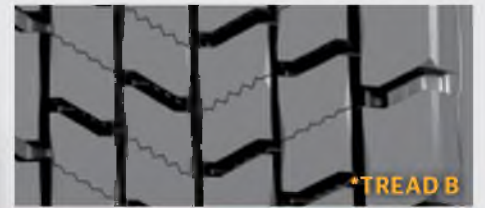


PRODUCT DATA



TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIMS)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	SINGLE	DUAL
					LBS, PSI (KG, KPa)		LBS, PSI (KG, KPa)														
11R22.5	G	05210150000	27	75	19.7	500	42.0	1067	11.7	296	131	331	8.25, 750	12.5	318	493	306	130	59	6175, 105 (2800, 720)	5840, 105 (2650, 720)
11R22.5	H	05210160000	27	75	19.7	500	42.0	1067	11.7	296	131	331	8.25, 750	12.5	318	493	306	131	60	6610, 120 (3000, 830)	6005, 120 (2725, 830)
295/75R22.5	G	05210170000	27	75	19.1	484	40.6	1031	11.7	296	12.7	323	8.25, 900	12.5	318	510	317	125	57	6175, 110 (2800, 760)	5675, 110 (2575, 760)
11R24.5	H	05210560000	27	75	20.6	522	43.9	1114	11.6	294	130	330	8.25, 750	12.5	318	472	293	146	67	7160, 120 (3250, 830)	6610, 120 (3000, 830)
275/70R22.5* (Tread B)	H	05210920000	22	81	17.6	447	38.3	974	10.9	276	11.3	287	8.25, 750	12.1	307	551	342	115	52	6940, 130 (3150, 900)	6395, 130 (2900, 900)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. * - ECE Certified # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



Fuel efficient tread compound delivers exceptional rolling resistance balanced with mileage.



Directional tread design with regenerating sipe technologies deliver outstanding traction in tandem axle fitment.






Optimized contour and **balanced footprint distribution** provide extended tread life and premium wear performance.



Built on the **Conti 3G Casing** for maximum retreadability.

Applications: Combined long haul highway and regional tandem drive position.

Legend:

 3G Casing	 SmartWay Verified	 With TPMS Sensor	 Retread Available
--	--	---	--

HDR

Regional Drive



 GOODS  PEOPLE  CONSTRUCTION

PRODUCT DATA



TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	SINGLE	DUAL
					LBS, PSI (KG, KPa)		LBS, PSI (KG, KPa)														
255/70R22.5*	H	05223330000	26	81	173	439	37.0	94.0	10.0	255	10.8	274	8,25, 750	11.3	287	559	347	97	44	5510, 120 (2500, 830)	5070, 120 (2300, 830)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. * - ECE Certified. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



Multi-service tread compound for local and long haul service.




Offset center tread blocks provide excellent all weather traction.

Tapered tread grooves reduce stone retention for long casing life and multiple retreads.

Applications: Drive position, short and long haul. On/off highway service.

Legend:

 3G Casing	 SmartWay Verified	 With TPMS Sensor	 Retread Available
--	--	---	--

HDW2

Regional Drive for Winter

 GOODS  PEOPLE  CONSTRUCTION



REGIONAL

PRODUCT DATA




TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	SINGLE	DUAL
					LBS, PSI (KG, KPa)		LBS, PSI (KG, KPa)														
11R22.5*	H	05230120000	27	75	196	497	41.9	1063	11.6	294	13.0	329	8.25	12.5	318	495	307	135	61	6940, 120 (3150, 830)	6395, 120 (2900, 830)
11R24.5*	H	05230130000	27	75	206	522	43.9	1114	11.6	294	13.0	329	8.25	12.5	318	472	293	145	66	7160, 120 (3250, 830)	6610, 120 (3000, 830)
315/80R22.5*	L	05230490000	27	75	197	500	42.4	1076	12.3	312	12.5	318	9.00, 8.25	13.8	351	491	305	137	62	9090, 130 (4125, 900)	8270, 130 (3750, 900)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. * - ECE Certified # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer. 315/80R22.5 tires used on 8.25" rims are restricted to a maximum of 7610 lbs.



All season tires ensures optimum performance in a variety of winter conditions from ice to deep snow.



Directional tread design with more than 1000 sipes provides excellent traction and lateral stability.

Siping engineered with Continental's **3D-Technology**.







More grip on snow and ice thanks to new **special winter compound**.



39% more tread volume compared to HDW by utilizing the all new Conti 3G Casing.


Applications: Drive axle tire for extreme weather conditions.

Legend:

			
3G Casing	SmartWay Verified	With TPMS Sensor	Retread Available

Conti Hybrid HT3

Durable Fuel-Efficient Trailer for Spread Axles

 GOODS  PEOPLE  CONSTRUCTION



PRODUCT DATA



TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	SINGLE	DUAL
					LBS, PSI (KG, KPa)		LBS, PSI (KG, KPa)														
11R22.5	G	05321060000	16	75	19.2	488	41.2	1046	11.1	282	12.0	305	8.25	12.5	318	502	312	112	51	6175, 105 (2800, 720)	5840, 105 (2650, 720)
11R22.5	H	05321250000	16	75	19.2	488	41.2	1046	11.1	282	12.0	305	8.25	12.5	318	502	312	112	51	6610, 120 (3000, 830)	6005, 120 (2725, 830)
295/75R22.5	G	05321040000	16	75	18.5	470	39.6	1006	11.1	282	12.6	320	8.25	12.5	318	523	325	107	49	6175, 110 (2800, 760)	5675, 110 (2575, 760)
295/75R22.5	H	05321270000	16	75	18.5	470	39.6	1006	11.1	282	12.6	320	8.25	12.5	318	523	325	113	51	7160, 120 (3250, 830)	6610, 120 (2725, 830)
11R24.5	G	05321070000	16	75	20.2	513	43.1	1095	11.1	282	12.0	305	8.25	12.5	318	480	298	120	54	6610, 105 (3000, 720)	6005, 105 (2725, 720)
11R24.5	H	05321260000	16	75	20.2	513	43.1	1095	11.1	282	12.0	305	8.25	12.5	318	480	298	120	54	7160, 125 (3250, 830)	6610, 120 (3000, 830)
285/75R24.5	G	05321050000	16	75	19.2	488	40.9	1039	10.7	272	12.1	307	8.25	12.5	318	506	314	112	51	6175, 110 (2800, 760)	5675, 110 (2575, 760)
285/75R24.5	H	05321280000	16	75	19.2	488	40.9	1039	10.7	272	12.1	307	8.25	12.5	318	506	314	113	51	6780, 120 (3075, 830)	6175, 120 (2800, 830)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. * - ECE Certified # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



Advanced tread compound to achieve performance in high scrub application and still maintain low rolling resistance.



Patented groove technology for minimal stone retention, extending casing life.



Pyramidal stone ejection system integrated into the center groove for added casing protection.

Applications: Spread-axle trailer. Long haul and regional use.

Legend:

 3G Casing	 SmartWay Verified	 With TPMS Sensor	 Retread Available
---	---	--	---

HTR2

17.5" Regional Trailer

 GOODS  PEOPLE  CONSTRUCTION



REGIONAL

PRODUCT DATA



TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIMS)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)
215/75R175*	H	04920140000	16	68	141	359	30.2	767	8.3	211	8.6	220	6.00, 6.75	9.4	239	688	427	60	27	4805, 125 (2180, 860)	4540, 125 (2060, 860)
235/75R175*	H	04920110000	16	68	147	373	31.4	797	9.2	233	9.5	242	6.75, 7.50	10.3	262	662	412	72	33	6005, 125 (2725, 860)	5675, 125 (2575, 860)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. * - ECE Certified # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



Robust tread compound engineered to protect against cutting and chipping.






Innovative groove geometry designed to prevent stone retention and drilling.



Wide tread and shoulder ribs for improved wear and increased scuff resistance.

Applications: Trailer and pusher positions.

Legend:

 3G Casing	 SmartWay Verified	 With TPMS Sensor	 Retread Available
--	--	---	--

Conti Hybrid HS3

19.5" Regional All-Position

 GOODS  PEOPLE  CONSTRUCTION



REGIONAL


PRODUCT DATA



TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION			
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	IN	MM	MI	KM	LB	KG	SINGLE	DUAL
					LBS, PSI (KG, KPa)		LBS, PSI (KG, KPa)																
225/70R19.5	G	05124360000	16	87	14.9	378	31.9	810	8.6	218	9.4	239	6.00, 6.75	10.0	254	649	403	62	28	3970, 110 (1800, 760)	3750, 110 (1700, 760)		
245/70R19.5	G	05122970000	16	81	15.2	386	32.8	833	9.5	241	10.3	262	6.75, 7.50	11.0	279	631	392	75	34	4540, 110 (2060, 760)	4410, 110 (2000, 760)		
245/70R19.5	H	05124830000	16	81	15.2	386	32.8	833	9.5	241	10.3	262	6.75, 7.50	11.0	279	631	392	75	34	4940, 120 (2240, 830)	4675, 120 (2120, 830)		
265/70R19.5	H	05121160000	17	81	15.8	401	34.7	881	10.3	262	10.7	272	7.50, 6.75, 8.25	11.2	286	613	380	82	37	5510, 115 (2500, 790)	5205, 115 (2360, 790)		
285/70R19.5	H	05121130000	18	81	16.2	412	35.9	911	11.1	283	11.6	294	8.25, 7.50, 9.00	12.5	318	590	366	93	42	6610, 125 (3000, 860)	6175, 125 (2800, 860)		

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.

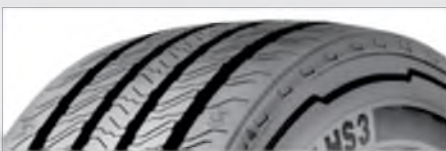

Two-layer tread construction combines high mileage performance in the cap compound with significant rolling resistance improvements in the base compound.



Narrowed groove widths result in increased pattern volume which improves wear resistance to guarantee high mileage performance.

Pocket sipe technology with full-depth sipes to enhance water displacement and improve wet performance over the life of the tire.

Applications: Long haul/Regional over the highway all-position use.

Legend:

 3G Casing	 SmartWay Verified	 With TPMS Sensor	 Retread Available
--	--	---	--

HSR

19.5" Regional All-Position

 GOODS  PEOPLE  CONSTRUCTION



REGIONAL

PRODUCT DATA



TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIMS)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION			
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	LB, PSI	KG, KPa)	LB, PSI	KG, KPa)
225/70R19.5*	G	05122180000	16	87	14.9	378	31.9	810	8.6	218	9.5	241	6.00, 6.75	10.0	254	649	403	62	28	3970, 110	3750, 110		
TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS																							

Note - Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. * - ECE Certified # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



Advanced tread compound delivers improved fuel efficiency, increased removal miles and improved resistance to cuts and tears.



Aggressive tread design provides excellent lateral stability to minimize squirm, and improve wet handling performance.







Closed shoulder tread pattern provides even wear and reduced noise.



Scuff rib to protect against curbing, cuts and abrasions.

Applications: Regional hauling and on/off road, all-position.


Legend:

 3G Casing	 SmartWay Verified	 With TPMS Sensor	 Retread Available
--	--	---	--

Conti Hybrid HD3

19.5" Regional Drive

 GOODS  PEOPLE  CONSTRUCTION

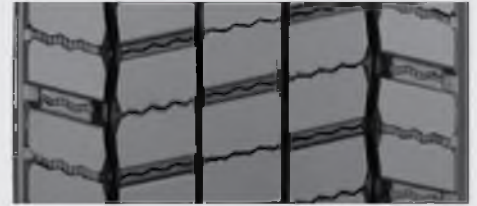

TREAD B


PRODUCT DATA



TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION			
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	IN	MM	MI	KM	LB	KG	LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)
					SINGLE		DUAL																
225/70R19.5	G	05223810000	18	87	15.0	381	32.0	813	8.6	218	9.3	237	600, 675	10.0	254	647	402	66	30	3970, 110 (1800, 760)	3750, 110 (1700, 760)		
245/70R19.5	G	05222240000	20	81	15.4	391	33.3	846	9.5	241	10.4	264	750, 675	11.0	279	622	386	82	37	4540, 110 (2060, 760)	4410, 110 (2000, 760)		
245/70R19.5	H	05220900000	20	81	15.4	391	33.3	846	9.5	241	10.4	264	750, 675	11.0	279	622	386	82	37	4940, 120 (2240, 830)	4675, 120 (2120, 830)		
265/70R19.5 (Tread B)	H	05220890000	21	81	15.8	401	34.7	881	10.3	262	10.7	272	750, 675, 8.25	11.2	286	613	381	86	39	5510, 115 (2500, 790)	5205, 115 (2360, 790)		
285/70R19.5 (Tread B)	H	05220880000	21	81	16.2	412	35.9	911	11.1	283	11.6	294	8.25, 750, 9.00	12.5	318	590	366	97	44	6610, 125 (3000, 860)	6175, 125 (2800, 860)		

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. * - ECE Certified. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.

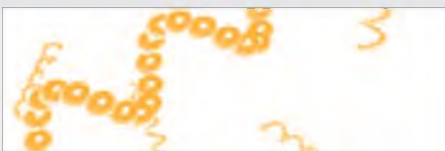

Advanced application-optimized **Hybrid tread compound** adds up to significant improvements in rolling resistance and mileage.



Narrowed groove widths result in increased pattern volume which improves wear resistance to guarantee high mileage performance.



Chamfered Edge reduces deformation amplitude in sidewall and bead area which results in improved rolling resistance and helps lower fuel consumption.

Applications: Long haul/Regional over the highway drive use.

Legend:

 3G Casing	 SmartWay Verified	 With TPMS Sensor	 Retread Available
--	--	---	--

HDR

19.5" Regional Drive

 GOODS  PEOPLE  CONSTRUCTION



REGIONAL


PRODUCT DATA



TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIMS)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)
225/70R195*	G	05221460000	18	87	15.0	381	32.0	813	8.6	218	9.4	239	6.00, 6.75	10.0	254	647	402	62	28	3970, 110 (1800, 760)	3750, 110 (1700, 760)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. * - ECE Certified # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



Advanced tread compound delivers improved fuel efficiency, increased removal miles and improved resistance to cuts and tears.



18/32" tread pattern provides excellent traction and long mileage in regional and local service.




Aggressive tread design provides excellent lateral stability to minimize squirm and improve wet handling performance.



Open shoulder tread pattern with tie-bar provides even tread wear along with reduced noise and improved traction.

Applications: Regional hauling and on/off road, drive position.

Legend:



Conti Scandinavia HD3

19.5" Regional Drive for Winter

GOODS PEOPLE CONSTRUCTION



REGIONAL

PRODUCT DATA




TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIMS	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	SINGLE	DUAL
					LBS, PSI (KG, KPa)		LBS, PSI (KG, KPa)														
225/70R19.5*	G	05230340000	19	87	151	383	32.0	813	8.6	218	9.3	236	6.00, 6.75	10.0	254	647	402	66	30	3970, 110 (1800, 760)	3750, 110 (1700, 760)
245/70R19.5*	H	05230360000	21	81	155	394	33.3	845	9.5	241	10.4	264	7.50, 6.75	11.0	279	622	386	82	37	4940, 120 (2240, 830)	4675, 120 (2120, 830)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains * - ECE Certified # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



Deep tread and low void design ensures long removal miles.



Heavy siping provides **numerous gripping edges** for excellent traction on wet roads.



Open shoulder tread design for increased traction in snow.

Increased footprint contact area delivers superior traction and stability.



All season compound to deliver excellent traction in all weather conditions without sacrificing removal miles.

Applications: Drive axle tire for extreme weather conditions.

Legend:

 3G Casing	 SmartWay Verified	 With TPMS Sensor	 Retread Available
--	--	---	--

Conti Hybrid HT3

19.5" Regional Trailer

 GOODS  PEOPLE  CONSTRUCTION



REGIONAL

PRODUCT DATA



TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIMS	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	IN	MM	MI	KM	LB	KG
265/70R19.5	H	05320960000	17	68	15.8	401	34.7	881	10.3	262	10.7	272	750, 675, 825	11.6	295	609	378	80	36	6005, 125 (2725, 860)	5675, 125 (2575, 860)
285/70R19.5	J	05320420000	18	68	16.2	412	35.9	911	11.1	283	11.6	294	825, 750, 900	12.5	318	690	366	93	42	7390, 130 (3350, 900)	6940, 130 (3150, 900)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. * - ECE Certified # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



Advanced application-optimized compound adds up to significant improvements in rolling resistance and mileage.



Narrowed groove widths result in increased pattern volume which improves wear resistance to provide high mileage performance.




Low rolling resistance sidewall compound used to reduce heat through friction elimination.

Applications: Long haul/Regional over the highway trailer use.

Regional Retread Product Overview

For Highway & Local Driving


Legend:





(Rename of CrossTrac HA3)




HSR 3  




HSR -18/32"  




HSR -16/32"  




HSR1  





LSR1  




HDR2  





HDR2 Eco Plus  





HDR1  



HDR1 Eco Plus  




Scandinavia HD3  



HDW2  




Hybrid HT3  



HTR2 SA  



HTR2  



ContiTread HSR 3 (Rename of CrossTrac HA3) | Regional All-Position



PRODUCT DATA			
WIDTH (MM)	ARTICLE NUMBER (ContiTread CrossTrac HA3)	ARTICLE NUMBER (ContiTread HSR 3)	TREAD DEPTH (32nds)
190	18214990000	18217850000	20
200	18215000000	18217860000	20
210	18215010000	18217870000	20
220	18215020000	18217880000	20
230	18215030000	18217890000	20
240	18215040000	18217900000	20

- Zigzag center groove geometry increases the number of biting edges for increased traction.
- Pyramidal stone ejectors in all tread grooves to stop stone retention for long casing life.
- Durable compounding for mileage.

ContiTread HSR - 18/32" | Regional All-Position



PRODUCT DATA		
WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
195	18207940000	18
215	18204780000	18
225	18204790000	18
235	18204800000	18

- Cut and chip resistant tread for long tread life.
- Pyramidal stone ejectors in all tread grooves to stop stone retention for long casing life.
- Robust shoulder rib for long tread life.

ContiTread HSR - 16/32" | 19.5" Regional All-Position



PRODUCT DATA		
WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
180	18310030000	16
195	18310460000	16

- 16/32" cut and chip resistant tread for long tread life.
- Aggressive tread design provides excellent lateral stability to minimize squirm, and improve wet handling performance.
- Closed shoulder to protect against curbing, cuts and abrasions.

ContiTread HSR1 | Regional All-Position





PRODUCT DATA		
WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
205	18211270000	16
215	18310020000	16
225	18207900000	16
235	18207910000	16

- Tread compound designed to provide long life in regional applications.
- Patented innovative groove technology leads to minimum stone retention, extending casing life.
- Tread pattern designed for excellent wet traction and reduced noise.

ContiTread LSR1 | 17.5" Regional All-Position





PRODUCT DATA  		
WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
160	18206070000	15
180	18206080000	15
188	18206090000	15
195	18206100000	15
205	18207890000	15

- Advanced tread compound provides high mileage in regional applications.
- Multi-rib tread design features excellent wet traction, lateral stability and reduced noise.
- Unique pyramid shaped stone ejection system in all tread grooves reduce stone retention and casing penetrations.

ContiTread HDR2 | Regional Drive





PRODUCT DATA  		
WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
185	18215760000	22
195	18215770000	22
205	18215780000	26
215	18215790000	26
225	18215800000	26
235	18215810000	26
245	18215820000	26


- Cut and tear resistant tread compound for excellent wear in regional and light On/Off applications.
- Optimal performance on various road conditions, through an innovative tread compound.
- Unidirectional, arrow shaped tread pattern minimizes typical drive tire wear effects.

ContiTread HDR2 Eco Plus | Fuel Efficient, Regional Drive



PRODUCT DATA  		
WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
215	18208110000	26
225	18208120000	26
235	18208130000	26
245	18208140000	26

- Advanced, fuel efficient compound provides long original mileage and rolling resistance.
- Optimal performance on various road conditions, through an innovative tread compound.
- Arrow shaped tread pattern minimizes typical drive tire wear effects.



ContiTread HDR1 | Regional Drive



PRODUCT DATA		
WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
160	18215600000	16
170	18215610000	16
180	18215620000	16
190	18215630000	16
200	18215640000	16
215	18215650000	16
190	18215660000	20
200	18215670000	20
205	18218070000	22
215	18215680000	22
225	18215690000	22
235	18215700000	22
245	18215710000	22
215	18215720000	26
225	18215730000	26
235	18215740000	26
245	18215750000	26

- Cut and tear resistant tread compound for excellent wear in regional and light On/Off applications.
- Open shoulder tread design provides excellent wet/dry traction, resists irregular wear and reduces stone retention.
- Innovative lug angle provides outstanding traction throughout the life of the tread.

ContiTread HDR1 Eco Plus | Fuel Efficient Regional Drive



PRODUCT DATA		
WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
215	18207700000	22
225	18207710000	22
235	18207720000	22
245	18207730000	22

- Advanced, fuel efficient compound provides long original mileage and rolling resistance.
- Open shoulder tread design provides excellent wet/dry traction, resists irregular wear and reduces stone retention.
- Innovative lug angle provides outstanding traction throughout the life of the tread.

ContiTread Scandinavia HD3 | Regional Drive for Winter



PRODUCT DATA		
WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
210	18211340000	25
220	18211350000	25
230	18211360000	25
240	18211370000	25


- Directional* tread pattern for improved traction.
- Full sipes located on center ribs in center grooves at 22/32" for improved snow evacuation.
- Pocket sipes featured throughout the tread pattern at 13/32"
- Optimized groove geometry for stone trapping resistance.
- Tie bars included to improve wear mileage near end of life.

Legend:




SmartWay Verified New Tire Available

ContiTread HDW2 | Regional Drive for Winter



Tread B

PRODUCT DATA		
WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
215	18209370000	27
225	18209380000	27
235	18209390000	27
245 (Tread B)	18209400000	27
260 (Tread B)	18209410000	27

- High-mileage compound
- All season tread ensures optimum performance in a variety of winter conditions from ice to snow.
- Directional* tread design with more than 1,000 sipes provides excellent traction and lateral stability in 245 and 260 mm sizes.

ContiTread Hybrid HT3 | Regional Trailer for Spread Axle



PRODUCT DATA		
WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
200	18214620000	16
210	18214630000	16
220	18214640000	16
230	18214650000	16

- New and improved winged tread for use in high scrub applications, particularly spread-axle and multi-axle.
- Durable high mileage compounding.
- Pyramidal stone ejection system integrated into the center groove for added casing protection.

ContiTread HTR2 SA | Regional Trailer for Spread Axle



PRODUCT DATA		
WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
200	18213680000	16
240	18207560000	16
250	18207570000	16
260	18207580000	16
270	18207590000	16
290	18207600000	16

- Winged tread for use in high scrub applications, particularly spread-axle and multi-axle.
- High mileage achieved through precise balance of tread compound and geometry.

ContiTread HTR2 | Regional Trailer



PRODUCT DATA		
WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
290	18206730000	22
320	18206740000	22
340	18206750000	22

- High mileage achieved through precise balance of tread compound and geometry.
- Tread pattern designed for increased stability and reduced noise.
- Patented innovative groove technology leads to minimum stone retention.

Conti360°

Continental's Fleet Services Web Portal

Accounting

Easily print or save your Continental invoices for commercial tires in PDF format. You also have the ability to download an Excel version of the list of all invoices and credits in a date range. Financial Statements are accessible for printing or saving, and you have the option of viewing your last month's statement or a real time statement. Also now includes "Dispute Invoice" functionality and dealer Proof of Service Images.

Accessibility

Gain access to the Dealer Locator. Customers can also connect to the ContiConnect portal via Conti360°.

Reporting

With Conti360°, you can gain insight into so many aspects of your fleet. From breakdown analysis to purchases to product performance, our reporting feature is designed to keep you in the know.

Learn more about reporting below.

Ordering

Order Continental's Digital Solutions, including replacement parts, additional tire sensors, and more, directly from the Conti360° Fleet Services web portal.

Training

Fleets can access the ENGAGE360° virtual training center to learn about Continental products and solutions, including opportunities to increase uptime and improve tire performance.



www.Conti360Fleet.com - YOUR 24/7 BUSINESS SOLUTION

Conti360° Reporting is designed to keep fleets in the know:

TrukFix

If your fleet participates in Continental's TrukFix roadside breakdown assistance program, you will be able to generate a detailed report of breakdowns, causes, downtime, and more.

ContiTrack2

ContiTrack2 digital tire inspections are performed by your Continental sales representative or dealer. Detailed reports on tire wear, tread depth, and recommendations to improve performance are available for viewing and printing.

CLCSoft

Fleets who use our ContiLifeCycle partners to retread their casings have the ability to track the progress of the retread. Several reports (i.e. Non-Retreadable Summary, Operational Summary and Retread Summary) are available for a 360° view.

Sales & Service

Within a specified time period, you have the ability to view product and digital solution purchases, as well as run reports of which services your dealer performed.

Urban

For Inner City Traffic & Short Distances


Hours of Service // Superior Mileage // Durable Cut/Chip Compounding // Casing Durability

Engineered for your application. Urban tires are designed for inner city traffic applications where traction, hours of service and mileage are priority. Tires operating within this application normally operate through short distances experiencing heavy scrub. Tires are designed to withstand heat generation as well as heavy loads where safety is essential. Extra sidewall protection is required to protect the casing from curbing, cuts and abrasions. Casing durability is the key aspect for segment satisfaction.

IMPORTANT NOTE: Tire Products are now classified by route. Product details are subject to change, please visit our website or contact your local sales representative for the most up to date information.



Legend:

 3G Casing	 SmartWay Verified	 With TPMS Sensor	 Retread Available
--	--	---	--

Urban

Truck Tire Product Overview







Conti Urban HA3
3G   



Conti HAU 3 WT
3G   
(Rename of Conti CityService HA3)

Legend:

 3G Casing	 SmartWay Verified	 With TPMS Sensor	 Retread Available
--	--	---	--

Conti Urban HA3

Urban All-Position

● GOODS ● PEOPLE ● CONSTRUCTION



PRODUCT DATA



TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)
305/70R22.5*	L	05140960000	23	68	18.6	473	39.9	1014	11.6	294	12.6	320	9,00, 8,25	13.5	343	519	322	130	59	7830, 130 (3550, 900)	6940, 130 (3150, 900)


TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. These specifications subject to change without notice. * - ECE Certified. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



Increased sidewall gauge for improved resistance against curbing, cuts and abrasions.

Sidewall wear indicator for visual cue to trigger rotation.



New urban tread compound for prolonged mileage performance with excellent driving characteristics.







Comfortable ride for driver and passengers through extremely quiet running tread.



Durable casing for premium retreadability and enhanced mileage.

Applications: Urban steer/all-position, city bus use.

Legend:

 3G Casing	 SmartWay Verified	 With TPMS Sensor	 Retread Available
---	---	--	---

Straight4ward
New Nomenclature Product Name Change

2019 Product Data Guide
TIRE PRODUCTS

Conti HAU 3 WT (Rename of Conti CityService HA3)

Urban All-Position for Waste Transport

 GOODS  PEOPLE  CONSTRUCTION



PRODUCT DATA




	TIRE SIZE	LOAD RANGE	ARTICLE NUMBER (Conti HSL 3)	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIMS	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
						IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	IN	MM	MI	KM	LB	KG
CityService HA3	315/80R225*	L	05140590000	26	68	20.0	507	43.1	1095	12.4	314	13.8	349	9.00, 8.25	13.8	351	480	298	163	74	10000, 130 (4540, 900)	9090, 130 (4125, 900)
Conti HAU 3 WT	315/80R225*	L	05141090000	26	68	20.0	507	43.1	1095	12.4	314	13.8	349	9.00, 8.25	13.8	351	480	298	163	74	10000, 130 (4540, 900)	9090, 130 (4125, 900)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. * - ECE Certified. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. 315/80R225 tires used on 8.25" rims are restricted to a maximum of 7610 lbs at 120 psi. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



Four rib tread pattern with zigzag groove geometry for resistance to high scrub applications.



Innovative tread compound for outstanding mileage and heat reduction.



Improved bead design for increased durability and resistance to brake heat.



Extra sidewall protection for better resistance to curbs, cuts, and other sidewall abrasions.

Applications: Waste transportation and other high scrub, urban applications.

Urban Retread Product Overview

For Inner City Traffic & Long Distances

Legend:



ContiTread HAU 3 WT (Rename of CityService HA3)

Urban All-Position for Waste Transport



PRODUCT DATA

WIDTH (MM)	ARTICLE NUMBER (ContiTread CityService HA3)	ARTICLE NUMBER (ContiTread HAU 3 WT)	TREAD DEPTH (32nds)
210	18215180000	18217910000	26
220	18211300000	18217920000	26
230	18211310000	18217930000	26
240	18211320000	18217940000	26
250	18210500000	18217950000	26
260	18210510000	18217960000	26
270	18210520000	18217970000	26
280	18210530000	18217980000	26

- Optimized tread compound for long removal mileage and chip and chunk resistance.
- Robust four rib tread design for increased durability in high scrub applications.
- Zig-zag groove geometry engineered specifically for use in waste transportation.

ContiTread HDU 3 WT (Rename of CityService HD3)

Urban Drive for Waste Transport



PRODUCT DATA

WIDTH (MM)	ARTICLE NUMBER (ContiTread CityService HD3)	ARTICLE NUMBER (ContiTread HDU 3 WT)	TREAD DEPTH (32nds)
210	18215190000	18217990000	32
220	18209150000	18218000000	32
230	18209160000	18218010000	32
240	18209170000	18218020000	32
250	18209180000	18218030000	32
260	18209190000	18218040000	32
270	18209200000	18218050000	32
280	18209210000	18218060000	32

- Deep 32/32" tread depth and open shoulder tread design for excellent traction.
- Shoulder notches included in design to prevent heat build-up.
- Chip and chunk resistant compounding for endurance in waste and other high scrub applications.
- Tie bars included to improve wear mileage near end of life.

Construction For Durability On & Off-Road

Superior Mileage // Durable Cut/Chip Compounding // Resistance to Stone Drilling // Optimal Retreadability

Engineered for your application. Tires for Construction and On/Off Road use are designed for vocational applications such as utility trucks, concrete mixers, and dump trucks, etc., where they spend some time on the pavement but are also likely to encounter curbs, stones, debris, and tight turns. Tires are optimized for durability and traction, as well as minimal stone retention and cut-and-tear resistance.

IMPORTANT NOTE: Tire Products are now classified by route. Product details are subject to change, please visit our website or contact your local sales representative for the most up to date information.



Legend:



3G Casing



SmartWay Verified



With TPMS Sensor



Retread Available

Construction

Truck Tire Product Overview



HSC1
3G



HDC1
3G



HDC1 HT
3G



HTC1
3G



HTC
3G

NEW IN 2019!

Continental is launching a brand new line of Construction tires and retreads. Available in 2019:

- **Conti HSC 3**
- **Conti HDC 3**
- **Conti HAC 3**




Contact a Sales Representative for more information.


Legend:

 3G Casing	 SmartWay Verified	 With TPMS Sensor	 Retread Available
---	---	--	---

HSC1

Construction All-Position

 GOODS  PEOPLE  CONSTRUCTION

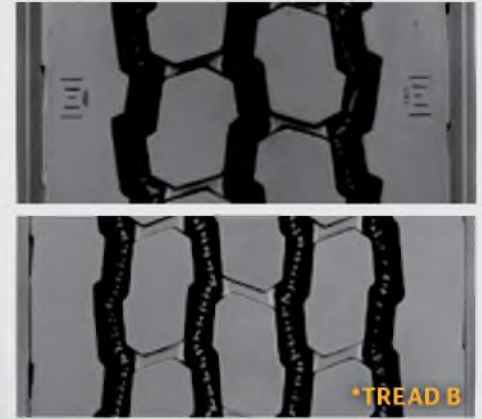

PRODUCT DATA




TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	SINGLE	DUAL
					LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)													
11R22.5*	H	05686530000	24	68	196	499	41.7	1059	11.2	284	122	310	8.25, 750	12.5	318	496	308	131	59	6610, 120 (3000, 830)	6005, 120 (2725, 830)
12R22.5	H	05686550000	24	68	20.2	512	43.0	1092	11.4	290	121	306	9.00, 8.25	13.5	343	482	299	138	63	7390, 120 (3350, 830)	6780, 120 (3075, 830)
315/80R22.5 (Tread B)	L	05152990000	23	68	19.8	502	42.7	1086	12.5	318	13.8	351	9.00, 8.25	13.8	351	484	301	162	73	10000, 130 (4540, 900)	9090, 130 (4125, 900)
11R24.5	H	05686540000	24	68	20.6	524	43.9	1115	11.2	284	12.2	310	8.25, 750	12.5	318	472	293	135	61	7160, 120 (3250, 830)	6610, 120 (3000, 830)
12R24.5	H	05686560000	24	68	211	535	45.0	1142	11.4	290	12.6	319	9.00, 8.25	13.5	343	460	286	149	67	7830, 120 (3550, 830)	7160, 120 (3250, 830)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. * - ECE Certified # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. 315/80R22.5 tires used on 8.25" rims are restricted to a maximum of 7610 lbs at 120 psi. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



Tread pattern and compound integrated for optimal original mileage.




Optimized contour ensures higher load reserves and less deformation.

Wide tread and shoulder ribs for improved wear and increased performance.





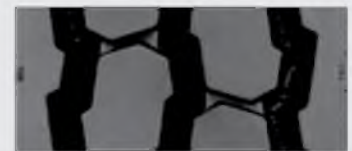

Improved bead construction for structural durability and extended product life.



Patented tread pattern and contour provide stable casing value through reduced stone retention and improved impact resistance.

Applications: Coal haulers, logging, construction and other all-position service.

Legend:

 3G Casing	 SmartWay Verified	 With TPMS Sensor	 Retread Available
---	---	--	---

HDC1

Construction Drive

 GOODS  PEOPLE  CONSTRUCTION



PRODUCT DATA



TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)
11R22.5	H	05687040000	32	68	19.7	500	42.4	1077	11.1	282	12.2	310	8.25, 7.50	12.5	318	488	303	130	59	6610, 120 (3000, 830)	6005, 120 (2725, 830)
11R24.5	H	05687050000	32	68	20.7	526	44.4	1128	11.1	282	12.2	310	8.25, 7.50	12.5	318	466	290	139	63	7160, 120 (3250, 830)	6610, 120 (3000, 830)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. * - ECE Certified # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



32/32" tread pattern and compound integrated for superior original mileage and traction.



Optimized contour ensures higher load reserves and less deformation.



Patented tread pattern and contour provide stable casing value through reduced stone retention and improved impact resistance.




Applications: Construction, coal haulers, logging, waste haulers and other on/off highway service.

Legend:

 3G Casing	 SmartWay Verified	 With TPMS Sensor	 Retread Available
--	--	---	--

HDC1 HT

Construction Drive for High Traction

 GOODS  PEOPLE  CONSTRUCTION



PRODUCT DATA



TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	SINGLE	DUAL
					LBS, PSI (KG, KPa)		LBS, PSI (KG, KPa)														
11R22.5	H	05250950000	32	68	19.9	505	42.2	1072	11.6	295	13.0	330	8.25	12.5	318	491	305	138	63	6610, 120 (3000, 830)	6005, 120 (2725, 830)
11R24.5	H	05250810000	32	68	20.7	526	44.2	1123	11.6	295	12.5	318	8.25	12.5	318	468	291	150	68	7160, 120 (3250, 830)	6610, 120 (3000, 830)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. * - ECE Certified # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change .01 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



Rigid belt package with full width top belt and extra sidewall protection for increased durability.



Diamond shaped tread lug design and shoulder notches are optimal for chaining.





Alternating groove geometry and stone bumper system for maximum stone ejection.



Built on the innovative **Conti 3G Casing** for maximum retreadability.




Applications: Severe Service On/Off Road Drive Position.

Legend:

 3G Casing	 SmartWay Verified	 With TPMS Sensor	 Retread Available
--	--	---	--

HTC1

Construction All-Position

 GOODS  PEOPLE  CONSTRUCTION



PRODUCT DATA



TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIMS	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION			
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	IN	MM	MI	KM	LB	KG	SINGLE	DUAL
					LBS, PSI (KG, KPa)		LBS, PSI (KG, KPa)																
385/65R22.5*	L	05350090000	22	68	19.5	495	42.0	1067	14.7	373	16.2	411	12.25, 11.75	N/A	N/A	493	306	167	76	9920, 130 (4500, 900)	N/A		
425/65R22.5	L	05350100000	24	68	20.4	517	44.5	1130	16.6	422	18.0	457	12.25, 13.00, 14.00	N/A	N/A	465	289	183	83	11400, 120 (5150, 830)	N/A		
445/65R22.5*	L	05350190000	22	68	20.9	530	45.2	1148	17.4	441	18.6	472	13.00, 14.00	N/A	N/A	462	287	210	95	12800, 120 (5800, 830)	N/A		


TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. * - ECE Certified # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



Aggressive multi-service, **all-position tread pattern** provides excellent traction.

Outstanding **self-cleaning properties** ensure a long service life.

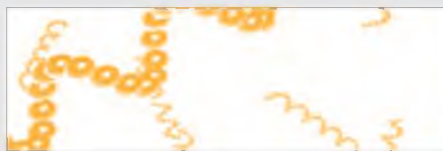

Cut and tear resistant tread compound for long tread life in on/off road conditions.



Rugged casing design resists casing penetrations and damage, allowing multiple retreads.




Applications: Wide base, all-position fitment for on/off, mixed service applications.

Legend:

			
3G Casing	SmartWay Verified	With TPMS Sensor	Retread Available

HTC

Construction Trailer

 GOODS  PEOPLE  CONSTRUCTION



PRODUCT DATA



TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIMS)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)
275/70R22.5*	J	05350390000	21	62	176	447	38.3	974	10.8	275	11.3	287	8.25, 750	12.2	311	551	342	108	49	6940, 125 (3150, 860)	6395, 125 (2900, 860)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. * - ECE Certified # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



Aggressive multi-service, **all-position tread pattern** provides excellent traction in on/off road service.



Cut and tear resistant tread compound for long tread life in on/off road conditions.



Thick undertread resists casing penetration and damage for multiple retreads.

CONSTRUCTION

Applications: All-position fitment in on/off highway service.

ContiTread™

Construction Retread Product Overview

For Durability On & Off-Road

Legend:



HSC1
 




HSC
 



HDC1
 



HTC1
 



ContiTread HSC1 | Construction All-Position



PRODUCT DATA		
WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
215	18207080000	24
225	18207090000	24
235	18207100000	24
245	18207110000	24
255	18207120000	24

- Tread pattern and compound integrated to deliver optimal mileage.
- Wide tread and shoulder ribs improve wear and increase performance.

ContiTread HSC | Construction All-Position



PRODUCT DATA		
WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
215	18205480000	18
225	18205490000	18
235	18205500000	18
245	18205820000	18
255	18205830000	18
215	18205510000	23
225	18205520000	23
235	18205530000	23
245	18207640000	23

- On/Off-road compound increases resistance to cuts, chips and chunks. Also, reduces the number and depth of any cuts and tears.
- Patented innovative groove technology leads to minimum stone retention, extending casing life.

ContiTread HDC1 | Construction Drive



PRODUCT DATA		
WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
200	18207520000	26
215	18206960000	26
225	18206970000	26
235	18206980000	26
245	18206990000	26
260	18207000000	26
280	18207010000	26

- On/Off-road compound increases resistance to cuts, chips and chunks. Also, reduces the number and depth of any cuts and tears
- Open shoulder tread design ensures reliable grip and good handling both on and off the road.

ContiTread HTC1 | Construction Trailer



PRODUCT DATA		
WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
320	18206760000	24
350	18206770000	24

- Aggressive multi-surface, all-position tread pattern provides excellent traction.
- Outstanding self-cleaning properties ensure a long service life.

Off-Road For Severe Service & Maximum Durability




Excellent Traction // Hours of Service // Cut/Tear Resistant // Casing Durability

Engineered for your application. Tires for Off-Road and Severe Service use are designed to support construction, mining, logging, and other applications where vehicles travel across challenging surfaces strewn with rocks, nails, and debris. Tires are optimized for durability and high removal mileage, as well as cut-and-tear resistance and traction.

IMPORTANT NOTE: Tire Products are now classified by route. Product details are subject to change, please visit our website or contact your local sales representative for the most up to date information.



Legend:

3G 3G Casing	 SmartWay Verified	 With TPMS Sensor	 Retread Available
------------------------	--	---	--

Off-Road Truck Tire Product Overview



HCS
3G   




HDO
3G   



Conti Terra HD3 - 19.5"
3G   

Legend:



HCS

Severe Service All-Position

GOODS PEOPLE CONSTRUCTION




PRODUCT DATA



TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION			
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	IN	MM	MI	KM	LB	KG	SINGLE	DUAL
					LBS, PSI (KG, KPa)		LBS, PSI (KG, KPa)																
445/65R22.5*	L	05350330000	27	68	20.9	532	45.5	1156	17.7	449	19.0	482	13.00, 14.00	N/A	N/A	462	287	207	94	12800, 130 (5800, 900)	N/A		
325/95R24	J	05160330000	40	50	22.4	568	49.3	1252	12.8	325	131	332	8.50, 9.00	14.2	360	430	267	204	92	9370, 120 (4250, 830)	8540, 120 (3875, 830)		
325/95R24 (NHS)	J	05160340000	40	50	22.4	568	49.3	1252	12.8	325	131	332	8.50, 9.00	14.2	360	430	267	204	92	9370, 120 (4250, 830)	8540, 120 (3875, 830)		

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS


Note - Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. * - ECE Certified # - Exceeding the lawful speed limit is neither recommended nor endorsed. NHS - Not for Highway Use. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.

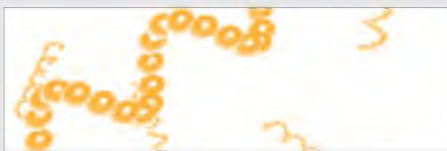

High operational safety, long lasting service and **outstanding resistance to damage through compounds** with extreme resistance to cuts and tears.



Outstanding traction, even in harshest terrain, thanks to **tread pattern structure and geometry**.

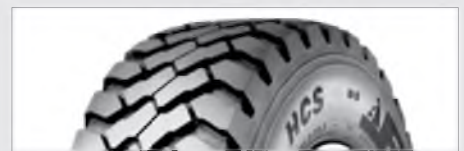

Most durable casing design for maximum service life in demanding off-road use, also involving heavy-duty vehicles.




Applications: All-Position service for on/off road, mining and heavy mix axles.

Legend:

 3G Casing	 SmartWay Verified	 With TPMS Sensor	 Retread Available
--	--	---	--

HDO

Off-Road Drive

 GOODS  PEOPLE  CONSTRUCTION



PRODUCT DATA

TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	IN	MM	MI	KM	LB	KG
11R22.5 *	H	05391190000	32	68	19.7	500	42.2	1072	11.0	280	12.0	306	8.25, 750	12.5	318	490	305	124	56	6610, 120 (3000, 830)	6005, 120 (2725, 830)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. * - ECE Certified # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



Deep 32/32" tread with cut/chip resistant tread provides excellent traction in off-road conditions.







Patented innovative groove technology leads to minimum stone retention, extending casing life.



Sidewall profile with curb rib reduces damage from curbing, cuts and abrasions.

Applications: Logging, mining, construction and other aggressive, off-road traction needs.

 3G Casing	 SmartWay Verified	 With TPMS Sensor	 Retread Available
--	--	---	--

Conti Terra HD3

19.5" - Off-Road Drive

 GOODS  PEOPLE  CONSTRUCTION



PRODUCT DATA




TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)
					SINGLE		DUAL														
225/70R19.5*	G	05260080000	19	75	15.4	390	32.3	821	8.6	218	9.4	239	6.00, 6.75	10.0	254	640	398	66	30	3970, 110 (1800, 760)	3750, 110 (1700, 760)
245/70R19.5*	H	05260070000	19	75	15.6	395	33.3	845	9.7	245	10.3	262	7.50, 6.75	11.0	279	622	387	82	37	4940, 120 (2240, 830)	4675, 120 (2120, 830)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. * - ECE Certified # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



Aggressive 19/32" open shoulder tread design provides outstanding traction in off road conditions.



Technologically **advanced cut/tear resistant tread compound** to provide long removal miles.



Circumferential protection rib engineered to withstand severe off road terrain.



Scuff rib to protect against curbing, cuts and abrasions.

Applications: Off-road severe service drive position.

Off-Road Retread Product Overview

For Severe Service & Maximum Durability

Legend:



ContiTread HCS | Severe Service All-Position



PRODUCT DATA		
WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
215	18213510000	32
225	18213520000	32
235	18213530000	32
245	18213540000	32
360	18213550000	32
380	18213560000	32

- Cut and tear resistant tread compound for long tread life in On/Off road conditions.
- Outstanding self-cleaning properties ensure a long service life.
- Aggressive tread pattern provides excellent traction.

ContiTread HDC1 HT | Construction Drive for High Traction



PRODUCT DATA		
WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
225	18211140000	32
235	18211150000	32
245	18211160000	32

- Diamond shaped tread lug design and shoulder notches are optimal for chaining.
- Alternating groove geometry and stone bumper system for maximum stone ejection.
- Aggressive cut and chip resistant compounding to resist the most severe of applications.

Tire Pressure Monitoring

Continental Digital Tire Monitoring Systems Help Deliver Your Lowest Overall Driving Cost

Saves You Time

Manual tire pressure checks are time-consuming and often inaccurate. A driver typically cannot feel or visually identify an under-inflated tire, making monitoring essential.

Improves Safety

Keeps your drivers and other drivers safer on the road.

Extends Tire Life

With a properly inflated tire, trucks can experience a 1% increase in fuel efficiency, 1.5% longer tread life and a 20% longer casing life versus a tire that is just 10% under inflated.

Saves You Money

Proper tire inflation can reduce road-side breakdowns, saving you an average of \$600-\$800 per percent. Digital tire monitoring can alert select creeping air loss before it would be noticed in a pre-trip inspection.



How It Works

Our Digital Tire Monitoring systems all start with the sensor. One sensor is placed on the inner liner of each tire for accurate tire pressure and temperature data. The sensor transmits data via radio frequency to one of our receiver device options below.

-  Increased Mileage
-  Longer Tread Life
-  Longer Casing Life
-  Reduce Roadside Breakdowns

The tire sensor transmits to any of the following Continental Digital Solutions systems:



ContiPressureCheck®
contipressurecheck.com

Single Vehicle Monitoring System



ContiConnect® Yard Reader

Fleet Monitoring System with Web Portal



ContiConnect® Light

Digital Tire Inspection System



ContiPressureCheck® Solo

GB-G2 compliant Standalone TMS for Trailers



Digital Tire Monitoring Solutions

Delivering Your Lowest Overall Driving Cost

One of the largest automotive suppliers and tire manufacturers in the world, Continental develops pioneering technologies to make fleets safer, more efficient, and more connected. With innovative digital tire monitoring technology and fleet solutions, Continental optimizes tire lifecycle management.

Reduce Tire-related Breakdowns // Eliminate Manual Tire Pressure Checks // Improve Fuel Efficiency // Extend Tire & Casing Life

About The Tire Sensor



Continental's Tire Sensor technology forms the basis for all of our digital tire monitoring solutions, transmitting data via radio frequency to receiver devices. Only one sensor is required per tire, and is mounted on the inner liner for accurate temperature and pressure data. The sensor is battery-powered and can last 6 years or up to 400,000 miles.

About The Solutions

ContiPressureCheck®

- Single vehicle monitoring
- Driver accesses data via in-cab display
- Data is collected whenever the vehicle is turned on, allowing the driver to immediately correct any issues
- Real-time data helps prevent dangerous tire blow-outs and roadside incidents
- Can also integrate with telematics systems such as Geotab and PeopleNet so data can be viewed remotely

ContiConnect®

- Multiple vehicle monitoring
- Fleet manager accesses data via a web portal
- Data is collected whenever vehicles are within range of the yard reader station, allowing fleet yard personnel to immediately correct any issues
- Issues can be corrected before the vehicles leave the fleet yard
- Historical data and reports available to track tires over time




ContiConnect®

Digital Tire Monitoring

ContiConnect® is Continental's tire information and management platform for commercial fleets. By digitalizing their tire maintenance programs, ContiConnect® fleets can ensure increased uptime, lower maintenance costs, and maximize fuel savings. Tire mounted sensors transmit tire pressure and temperature data to a Yard Reader Station and report status to a web portal. ContiConnect® fleets can receive customizable SMS or email alerts so that they can address tire pressure issues in real time and avoid costly breakdowns.

SENSOR

Our tire mounted sensor is the core of ContiConnect® and transmits a signal every two minutes.

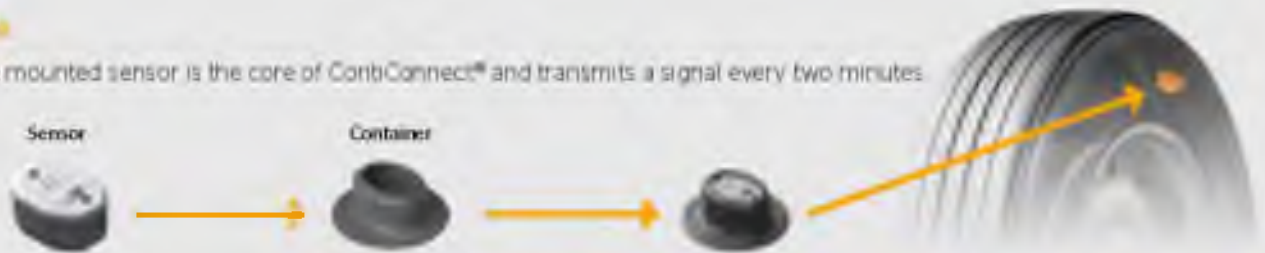

SIGNAL

The Yard Reader Station picks up signals when vehicles are within a 65 foot (20 meter) range.



DATA

Tire temperature and pressure data is then transmitted to the ContiConnect® web portal.



ALERT

Receive customizable text and email alerts when tire issues occur.



ContiConnect® Light

The cost-effective solution for monitoring the tire pressure of multiple vehicles by tool-assisted checking and manually uploading data to a web portal.

ContiPressureCheck®

Tire Pressure Monitoring

ContiPressureCheck® is Continental's tire pressure monitoring system for commercial fleets. Our unique system includes a sensor mounted inside the tire to capture the most accurate tire temperature and pressure data and inform the driver of tire related issues in real-time. Equipping a fleet with ContiPressureCheck® ensures lower tire maintenance costs, improved safety over the road, better tread life, and fuel mileage.

Easy—ContiPressureCheck® installation is quick and easy - the CCU and external antenna are mounted to the vehicle's frame and the display is wired into the cab. Then sensors are glued into tires and the vehicle is programmed.

Economical—For every 10 PSI of underinflation, you'll spend approximately 1% more on fuel and experience faster tread wear. Driving with the correct air pressure can lead to significant fuel savings and longer tire life, lowering your overall driving costs.

Reduce—The ContiPressureCheck® system helps avoid tire related breakdowns which can lead to costly downtimes, late fines, possible damage to public image and loss of sales or profits.

Prevention—Tire damage and breakdowns increase the possibility of roadway accidents, for both truck operators and motorists. Proper air pressure helps reduce risk factors.

Eco-friendly—Correct inflation pressure helps reduce rolling resistance - accounting for almost 35% of average fuel consumption. Better fuel economy is one of the simplest ways to reduce carbon emissions.



Extend the functionality of your ContiPressureCheck®

With Telematics Integration, display tire data remotely via any of our existing telematics partners: Zonar, PeopleNet, Geotab, and Road Ready. To learn more about our integration capabilities, contact Digital.Solutions@conti-na.com.



ContiPressureCheck® Solo

Trailer TPMS

As one of the largest automotive suppliers and tire manufacturers in the world, Continental is uniquely equipped to provide optimal support for digital tire monitoring technology. ContiPressureCheck® Solo is Continental's standard tire pressure monitoring system (TPMS) for trailers. The innovative system is designed to reduce trailer tire costs and is compliant with pending greenhouse gas regulations, keeping your fleet ahead of legislation.

Compliance – The system meets pending greenhouse gas regulations (GHG 2), preparing your fleet for upcoming legislation.

Easy Installation – From the installation process to driver utilization, ContiPressureCheck® Solo is intuitive and simple to use. The Notification Light uses an industry standard position and signal at an optimal rate to ensure driver visibility in real time, without causing distraction.

Long Life – Battery powered sensors are protected inside the tires and last 6 years or 400,000 miles, keeping maintenance to a minimum. Since the system is not connected to trailer air hoses, it does not introduce leak points.

Standard – As a standard trailer TPMS, it is ideal for drop and hook scenarios since there is no connection needed to a specific tractor.

Integration – Data can be integrated into trailer telematics platforms, allowing back office support personnel to view trailer tire pressure remotely.



Notification Light

If low pressure is identified in any of the trailer tires, the Notification Light is activated, visible in the driver's side mirror. Multiple levels of low pressure alerts ensure notifications reflect the severity of the issue.

Tire Sensors

Continental tire sensors form the basis of all of our digital tire monitoring solutions. Mounted on the inner liner of each trailer tire, they are protected from weather, theft, crushing and damage during tire mounting.

Central Control Unit (CCU)

The Central Control Unit continuously receives data from the tire sensors and activates the Notification Light if an alert is needed.

Sensor Features

- Integrated battery powered sensor with radio frequency transmitter
- One sensor per running wheel glued into the inner liner
- Compatible with multiple tire applications, brands and balancing substances

Sensor Benefits

- No influence** on tire performance, balance or rim temperature because of sensor position
- Accurate measurement of pressure and tire temperature from 28 PSI to 140 PSI
- Sensor lifetime - **6 years or 400,000 miles**

ContiLink

Your Connection to Dealer Support & Resources

Standard Claims Processing

If you can name it, you can claim it... pricing, shipping, sales tax, advertising and waste fee claims are just a few that have the ability to process through ContiLink.

Order Tracking

Whether you need to check product availability, place an order, track shipping or monitor backorder reports, ContiLink has your needs covered.

Marketing Needs

As a Continental dealer, you can purchase sales literature and point-of-sale material for your showroom anytime, or download digital copies in PDF format. Simply log into ContiLink and click on the Marketing Suite banner.

Training Center

Gain access to Engage360 Training, our online training center that covers everything from product information, tire basics to sales scenarios for CVT & much more!

Financial

Through ContiLink's Financial feature, you have the ability to view real-time debits/credits on open items and print, email or save copies of invoices, statements and credit memos.

National Accounts & Government Claims

Through the National Accounts and Government Claims section of ContiLink, you can submit delivery receipts, review customer requirements, submit government claims and more.

LOG ON TO WWW.CONTILINK.COM TODAY!

Administration

ContiLink gives Dealers the flexibility to update their profiles. Keep your dealer location information up to date, and edit users and user information as needed.

Digital Downloads

Need instant access to Continental resources? Visit the Marketing section of the ContiLink site and download digital copies of our literature, including Dealer Marketing Books.

Live Chat

Chat with a CVT Inside Sales representative or a National Account specialist to check your orders or if you have a question about a delivery receipt. Get the information you need when you need it.

Medium Truck Load/ Inflation Tables

Safety Warning

Serious Injury May Result From:

- Explosion of tire/rim assembly due to improper mounting. Use safety cage and clip-on extension air hose. Only specially trained persons should mount tires.
- Tire failure due to misapplication/improper inflation/overloading.

***Follow tire manufacturer's instructions.
Check inflation pressure frequently with calibrated gauge.***

Commercial Vehicle Tires

Normal and Wide-Base Sizes on 5 Degree or Flat-Based Rims - Radial Ply

Tire Loads Limits at Various Cold Inflation Pressures

24"			kPa	480	520	550	590	620	660	690	720	760	790	830
			psi	70	75	80	85	90	95	100	105	110	115	120
325/95R24	*	dual	kg	2780	2860	3020	3140	3250	3350	3450	3550	3650	3760	3875 (J)
			lbs	6120	6390	6650	6910	7160	7390	7610	7830	8050	8300	8540 (J)
	single	kg	2870	3020	3170	3300	3440	3650	3770	3890	4000	4130	4250 (J)	
		lbs	6330	6660	6980	7280	7580	8050	8310	8570	8820	9100	9370 (J)	

Conventional Sizes on 15 Degree Drop-Center Rims - Radial Ply

22.5"			kPa	480	520	550	590	620	660	690	720	760	790	830
			psi	70	75	80	85	90	95	100	105	110	115	120
10R22.5	*	dual	kg	1750	1830	1910	2000	2080	2160	2240	2300	2360	2430 (G)	--
			lbs	3860	4045	4230	4410	4585	4760	4940	5075	5210	5515	5355 (G)
	single	kg	1850	1940	2030	2120	2200	2280	2360	2430	2500	2575	2575 (G)	--
		lbs	4080	4280	4480	4675	4850	5025	5205	5360	5515	5675	5675 (G)	--
11R22.5	**	dual	kg	1990	2080	2160	2250	2360	2460	2560	2650 (G)	2680	2710	2725 (H)
			lbs	4380	4580	4760	4950	5205	5415	5625	5840 (G)	5895	5950	6005 (H)
	single	kg	2050	2160	2260	2370	2500	2600	2700	2800 (G)	2870	2940	3000 (H)	
		lbs	4530	4770	4990	5220	5510	5730	5950	6175 (G)	6320	6465	6610 (H)	
12R22.5	*	dual	kg	2170	2260	2350	2440	2575	2630	2680	2725 (G)	2840	2960	3075 (H)
			lbs	4780	4990	5190	5390	5675	5785	5895	6005 (G)	6265	6525	6780 (H)
	single	kg	2240	2360	2470	2580	2725	2820	2910	3000 (G)	3120	3240	3350 (H)	
		lbs	4940	5200	5450	5690	6005	6205	6405	6610 (G)	6870	7130	7390 (H)	

24.5"			kPa	480	520	550	590	620	660	690	720	760	790	830
			psi	70	75	80	85	90	95	100	105	110	115	120
11R24.5	*	dual	kg	2110	2210	2300	2390	2500	2580	2660	2725 (G)	2820	2910	3000 (H)
			lbs	4660	4870	5070	5260	5510	5675	5840	6005 (G)	6205	6405	6610 (H)
	single	kg	2190	2300	2410	2520	2650	2770	2890	3000 (G)	3080	3160	3250 (H)	
		lbs	4820	5070	5310	5550	5840	6095	6350	6610 (G)	6790	6970	7160 (H)	
12R24.5	*	dual	kg	2300	2400	2500	2600	2650	2770	2890	3000 (G)	3080	3160	3250 (H)
			lbs	5080	5300	5520	5730	5840	6095	6350	6610 (G)	6790	6970	7160 (H)
	single	kg	2380	2500	2630	2740	2900	3020	3140	3250 (G)	3350	3450	3550 (H)	
		lbs	5240	5520	5790	6040	6395	6650	6910	7160 (G)	7380	7600	7830 (H)	

CAUTION: Always use approved tire and rim combinations for diameters and contours.

NOTE: All values are for 65 mph unless otherwise noted, for tire load and inflation at various speeds, see next pages.

* Based on TRA | ** Based On ETRTO

NOTE: Letters in parentheses denote load range for which boldface loads are maximum.

Commercial Vehicle Tires

Metric and Wide-Base Sizes on 15 Degree Drop-Center Rims - Radial Ply

Tire Loads Limits at Various Cold Inflation Pressures

16"			kPa	240	280	310	340	380	410	450	480	520	550	650		
			psi	35	40	45	50	55	60	65	70	75	80	95		
LT225/75R16	**	Dual	kg	635	675	725	800 (C)	845	885	975 (D)	1000	1040	1120 (E)	1250 (F)		
			lbs	1365	1500	1630	1765 (C)	1875	1995	2150 (D)	2220	2330	2470 (E)	2755 (F)		
		Single	kg	680	745	795	880 (C)	930	970	1060 (D)	1100	1140	1215 (E)	1360 (F)		
			lbs	1500	1650	1790	1940 (C)	2060	2190	2335 (D)	2440	2560	2680 (E)	3000 (F)		
LT235/85R16	**	Dual	kg	720	770	835	910 (C)	960	1025	1080 (D)	1140	1200	1260 (E)	1400 (F)		
			lbs	1545	1700	1845	2006 (C)	2125	2260	2381 (D)	2515	2645	2778 (E)	3085 (F)		
		Single	kg	770	845	920	1000 (C)	1055	1125	1190 (D)	1250	1315	1380 (E)	1550 (F)		
			lbs	1700	1870	2030	2205 (C)	2335	2485	2623 (D)	2765	2905	3042 (E)	3415 (F)		
LT245/75R16	**	Dual	kg	720	770	835	910 (C)	960	1020	1080 (D)	1140	1195	1260 (E)	1400 (F)		
			lbs	1545	1700	1845	2006 (C)	2125	2255	2381 (D)	2515	2640	2778 (E)	3085 (F)		
		Single	kg	770	845	920	1000 (C)	1055	1125	1190 (D)	1250	1315	1380 (F)	1550 (F)		
			lbs	1700	1870	2030	2205 (C)	2335	2480	2623 (D)	2765	2900	3042 (F)	3415 (F)		
17.5"			kPa	480	520	550	590	620	660	690	720	760	790	830	860	
			psi	70	75	80	85	90	95	100	105	110	115	120	125	
215/75R175	**	Dual	kg	--	--	1450	1520	1590	1650	1720	1790	1860	1925	1990	2060 (J)	
			lbs	--	--	3195	3500	3500	3645	3795	3945	4095	4245	4390	4545 (J)	
		Single	kg	--	--	1530	1610	1680	1750	1820	1900	1960	2040	2110	2180 (J)	
			lbs	--	--	3375	3540	3695	3860	4010	4180	4330	4495	4650	4805 (J)	
235/75R175	**	Dual	kg	--	--	--	--	--	2020	2140	2200	2325	2380	2440	2575 (J)	
			lbs	--	--	--	--	--	4450	4720	4855	5120	5250	5380	5675 (J)	
		Single	kg	--	--	--	--	--	2080	2205	2270	2395	2455	2515	2725 (J)	
			lbs	--	--	--	--	--	4580	4860	5000	5275	5410	5545	6005 (J)	
245/70R175	**	Dual	kg	--	--	--	--	--	2020	2140	2200	2325	2380	2440	2575 (J)	
			lbs	--	--	--	--	--	4450	4720	4855	5120	5250	5380	5675 (J)	
		Single	kg	--	--	--	--	--	2080	2205	2270	2395	2455	2515	2725 (J)	
			lbs	--	--	--	--	--	4580	4860	5000	5275	5410	5545	6005 (J)	
19.5"			kPa	480	520	550	590	620	660	690	720	760	790	830	860	900
			psi	70	75	80	85	90	95	100	105	110	115	120	125	130
225/70R195	*	Dual	kg	1230	1300	1360	1410	1470	1550	1580	1640	1700 (G)	1750	1800 (H)	1850	1900 (J)
			lbs	2720	2860	3000	3115	3245	3415	3490	3615	3750 (G)	3855	3970 (H)	4085	4190 (J)
		Single	kg	1310	1380	1450	1500	1570	1650	1690	1740	1800 (G)	1860	1900 (H)	1970	2000 (J)
			lbs	2895	3040	3195	3315	3450	3640	3715	3845	3970 (G)	4100	4190 (H)	4245	4410 (J)
245/70R195	*	Dual	kg	--	--	1550	1590	1660	1750	1790	1850	1950 (G)	--	--	--	
			lbs	--	--	3415	3515	3655	3860	3940	4075	4410 (G)	--	--	--	
		Single	kg	--	--	1650	1700	1770	1850	1900	1970	2060 (G)	--	--	--	
			lbs	--	--	3640	3740	3890	4080	4190	4335	4540 (G)	--	--	--	
245/70R195 (LRH Only)	*	Dual	kg	--	--	1550	1590	1660	1750	1790	1850	1950	1970	2060 (H)	--	
			lbs	--	--	3415	3515	3655	3860	3940	4075	4300	4345	4540 (H)	--	
		Single	kg	--	--	1650	1700	1770	1850	1900	1970	2060	2095	2180 (H)	--	
			lbs	--	--	3640	3740	3890	4080	4190	4335	4540	4620	4805 (H)	--	
265/70R195 @81 mph	**	Dual	kg	1560	1640	1700	1780	1860	1950	2000	2000	2120	2360 (H)	--	--	
			lbs	3430	3600	3750	3930	4095	4300	4405	4415	4675	5205 (H)	--	--	
		Single	kg	1660	1740	1800	1900	1970	2060	2130	2200	2300	2500 (H)	--	--	
			lbs	3650	3830	3970	4180	4355	4540	4685	4850	5070	5510 (H)	--	--	
285/70R195 LRH @ 81 mph	**	Dual	kg	--	1870	1970	2065	2160	2260	2355	2450	2540	2630	2725 (H)	--	
			lbs	--	4125	4340	4555	4770	4980	5190	5395	5600	5805	6005 (H)	--	
		Single	kg	--	1990	2100	2200	2305	2405	2505	2605	2705	2805	2900 (H)	--	
			lbs	--	4390	4625	4855	5080	5305	5525	5745	5965	6180	6395 (H)	--	
285/70R195 LRJ @ 68 mph	**	Dual	kg	--	--	--	2240	2345	2450	2550	2650	2750	2850	2950	3050	3150 (J)
			lbs	--	--	--	4940	5170	5400	5625	5850	6070	6290	6510	6730	6940 (J)
		Single	kg	--	--	--	2385	2495	2610	2715	2825	2930	3040	3145	3250	3350 (J)
			lbs	--	--	--	5260	5505	5750	5990	6230	6465	6700	6930	7160	7390 (J)
305/70R195	*	Dual	kg	--	--	2060	2120	2200	2300	2370	2450	2575	2620	2725	2900 (J)	--
			lbs	--	--	4540	4670	4860	5070	5230	5410	5675	5770	6005	6395 (J)	--
		Single	kg	--	--	2240	2330	2420	2500	2610	2700	2800	2870	3000	3150 (J)	--
			lbs	--	--	4940	5130	5340	5510	5745	5945	6175	6340	6610	6940 (J)	--

22.5"			kPa	480	520	550	590	620	660	690	720	760	790	830	830	900
			psi	70	75	80	85	90	95	100	105	110	115	120	125	130
255/70R22.5	*	Dual	kg	--	--	1800	1860	1940	2000	2020	2090	2120	2230	2300 (H)	--	--
			lbs	--	--	3970	4110	4275	4410	4455	4610	4675	4915	5070 (H)	--	--
		Single	kg	--	--	1900	1980	2060	2120	2220	2300	2360	2450	2500 (H)	--	--
			lbs	--	--	4190	4370	4550	4675	4895	5065	5205	5400	5510 (H)	--	--
275/70R22.5	**	Dual	kg	--	--	--	2070	2155	2265	2345	2424	2535	2615	2720	2795	2900 (J)
			lbs	--	--	--	4565	4750	4995	5170	5345	5590	5765	5995	6160	6395 (J)
		Single	kg	--	--	--	2250	2340	2460	2550	2635	2750	2840	2955	3040	3150 (J)
			lbs	--	--	--	4960	5160	5420	5620	5810	6060	6260	6510	6700	6940 (J)
275/80R22.5	**	Dual	kg	1860	1950	2060	2130	2220	2300	2390	2470	2575 (G)	2630	2800 (H)	--	--
			lbs	4095	4300	4540	4690	4885	5070	5260	5440	5675 (G)	5795	6175 (H)	--	--
		Single	kg	2040	2140	2240	2340	2440	2500	2620	2710	2800 (G)	2890	3150 (H)	--	--
			lbs	4500	4725	4940	5155	5370	5510	5780	5980	6175 (G)	6370	6940 (H)	--	--
295/60R22.5 9.00" wheel @ 65mph	**	Dual	kg	--	--	--	2187	2290	2392	2492	2592	2690	2787	2885	2970	3075 (J)
			lbs	--	--	--	4825	5050	5275	5495	5715	5930	6145	6360	6570	6780 (J)
		Single	kg	--	--	--	2385	2495	2610	2715	2825	2930	3040	3145	3230	3350 (J)
			lbs	--	--	--	5260	5505	5750	5990	6230	6465	6700	6930	7160	7390 (J)
295/60R22.5 9.00" wheel @ 75mph	**	Dual	kg	--	--	--	2187	2290	2392	2492	2592	2690	2787	2885	2970	2970 (J)
			lbs	--	--	--	4825	5050	5275	5495	5715	5930	6145	6360	6570	6570 (J)
		Single	kg	--	--	--	2385	2495	2610	2715	2825	2930	3040	3145	3230	3230 (J)
			lbs	--	--	--	5260	5505	5750	5990	6230	6465	6700	6930	7160	7160 (J)
295/75R22.5	*	Dual	kg	1860	1950	2060	2130	2220	2300	2390	2470	2575 (G)	2630	2800 (H)	--	--
			lbs	4095	4300	4540	4690	4885	5070	5260	5440	5675 (G)	5795	6175 (H)	--	--
		Single	kg	2040	2140	2240	2340	2440	2500	2620	2710	2800 (G)	2890	3150 (H)	--	--
			lbs	4500	4725	4940	5155	5370	5510	5780	5980	6175 (G)	6370	6940 (H)	--	--
295/80R22.5	**	Dual	kg	2050	2160	2260	2370	2500	2600	2700	2800	2910	3030	3150 (H)	--	--
			lbs	4530	4770	4990	5220	5510	5730	5950	6175	6415	6670	6945 (H)	--	--
		Single	kg	2380	2500	2630	2740	2900	3020	3140	3250	3350	3450	3550 (H)	--	--
			lbs	5240	5520	5790	6040	6395	6650	6910	7160	7380	7600	7830 (H)	--	--
305/70R22.5	**	Dual	kg	1915	2020	2130	2235	2340	2445	2545	2645	2745	2845	2945	3150 (L)	--
			lbs	4220	4450	4700	4930	5160	5390	5610	5830	6050	6270	6490	6940 (L)	--
		Single	kg	2155	2280	2400	2520	2635	2755	2870	2985	3095	3210	3320	3430	3550 (L)
			lbs	4750	5030	5290	5560	5810	6070	6330	6580	6820	7080	7320	7560	7830 (L)
315/80R22.5	*	Dual	kg	--	--	2575	2650	2750	2900	2970	3070	3150	3270	3450	3600	3750 (L)
			lbs	--	--	5675	5840	6070	6395	6545	6770	6940	7210	7610	7940	8270 (L)
		Single	kg	--	--	2800	2910	3030	3150	3260	3370	3450	3590	3750	3940	4125 (L)
			lbs	--	--	6175	6415	6670	6940	7190	7440	7610	7920	8270	8680	9090 (L)
315/80R22.5** speed re- stricted LRL	**	Dual	kg	--	--	2800	2910	3030	3150	3260	3370	3450	3590	3750	3940	4125 (L)
			lbs	--	--	6175	6415	6670	6940	7190	7440	7610	7920	8270	8680	9090 (L)
		Single	kg	--	--	3050	3170	3300	3430	3550	3670	3760	3910	4125	4330	4540 (L)
			lbs	--	--	6725	6990	7275	7560	7825	8090	8290	8620	9090	9545	10000 (L)
385/65R22.5	**	Dual	kg	--	--	--	--	--	--	--	--	--	--	--	--	--
			lbs	--	--	--	--	--	--	--	--	--	--	--	--	--
		Single	kg	2880	3060	3150	3350	3470	3650	3740	3850	4000	4100	4250	4360	4500 (L)
			lbs	6380	6720	6940	7350	7650	8050	8230	8510	8820	9050	9370	9610	9920 (L)
425/65R22.5	**	Dual	kg	--	--	--	--	--	--	--	--	--	--	--	--	--
			lbs	--	--	--	--	--	--	--	--	--	--	--	--	--
		Single	kg	3430	3640	3750	3980	4130	4250	4440	4580	4750	4880	5150 (L)	--	--
			lbs	7590	7990	8270	8740	9100	9370	9790	10100	10500	10700	11400 (L)	--	--
445/50R22.5	*	Dual	kg	--	--	--	--	--	--	--	--	--	--	--	--	--
			lbs	--	--	--	--	--	--	--	--	--	--	--	--	--
		Single	kg	--	3150	3320	3480	3640	3810	3970	4120	4250	4430	4625 (L)	--	--
			lbs	--	6940	7310	7680	8030	8390	8740	9090	9370	9780	10200 (L)	--	--
445/65R22.5	*	Dual	kg	--	--	--	--	--	--	--	--	--	--	--	--	--
			lbs	--	--	--	--	--	--	--	--	--	--	--	--	--
		Single	kg	3720	3950	4125	4320	4470	4625	4820	4960	5150	5290	5800 (L)	--	--
			lbs	8230	8660	9090	9480	9870	10200	10600	11000	11400	11700	12800 (L)	--	--

24.5"			kPa	480	520	550	590	620	660	690	720	760	790	830
			psi	70	75	80	85	90	95	100	105	110	115	120
285/75R24.5	*	Dual	kg	1870	1970	2060	2150	2240	2360	2410	2490	2575 (G)	2660	2800 (H)
			lbs	4135	4340	4540	4740	4930	5205	5310	5495	5675 (G)	5860	6175 (H)
		Single	kg	2060	2160	2240	2360	2460	2575	2650	2740	2800 (G)	2920	3075 (H)
			lbs	4545	4770	4940	5210	5420	5675	5835	6040	6175 (G)	6440	6780 (H)

CAUTION: Always use approved tire and rim combinations for diameters and contours.

NOTE: All values are for 65 mph unless otherwise noted, for tire load and inflation at various speeds, see next pages.

* Based on TRA | ** Based On ETRTO

NOTE: Letters in parentheses denote load range for which boldface loads are maximum.

Load Limits At Various Speeds

For Radial Ply Truck Tires Used On Improved Surfaces

(These Tables apply to tires only. Consult rim/wheel manufacturer for rim/wheel load and inflation capacities.)

Tire And Rim Association Standard

FOR METRIC AND WIDE BASE TIRES

The service load and minimum (cold) inflation must comply with the following limitations unless a speed restriction is indicated on the tire or the manufacturer rates the tire at 75 mph or above.

SPEED RANGE (MPH)	RADIAL PLY TIRES	
	INFL. PRESSURE CHANGE	% LOAD CHANGE
71 thru 75	+5 psi	-12%
66 thru 70	+5 psi	-4%
51 thru 65	No Increase	None
41 thru 50	No Increase	+7%
31 thru 40	No Increase	+9%
21 thru 30	+10 psi	+12%
11 thru 20	+15 psi	+17%
6 thru 10	+20 psi	+25%
2.6 thru 5	+20 psi	+45%
Creep thru 2.5	+20 psi	+55%
Creep (2)	+30 psi	+75%
Stationary	+30 psi	+105%

FOR CONVENTIONAL TIRES

The service load and minimum (cold) inflation must comply with the following limitations unless a speed restriction is indicated on the tire or the manufacturer rates the tire at 75 mph or above.

SPEED RANGE (MPH)	RADIAL PLY TIRES	
	INFL. PRESSURE CHANGE	% LOAD CHANGE
71 thru 75	+5 psi	-12%
66 thru 70	+5 psi	-4%
51 thru 65	No Increase	None
41 thru 50	No Increase	+9%
31 thru 40	No Increase	+16%
21 thru 30	+10 psi	+24%
11 thru 20	+15 psi	+32%
6 thru 10 (1)	+30 psi	+60%
2.6 thru 5 (1)	+30 psi	+85%
Creep thru 2.5 (1)	+30 psi	+115%
Creep (1) (2)	+40 psi	+140%
Stationary (1)	+40 psi	+185%

NOTES

1. Apply these increases to Dual Loads and Inflation Pressures.
2. Creep - Motion for not over 200 feet in a 30-minutes period.

Note 1: The inflation pressures shown in the minimum cold pressures for the various loads listed.

Higher pressures should be used as follows:

- A. When required by the above speed/load table.
- B. When higher pressures are desirable to obtain improved operating performance. For speeds above 20 mph, the combined increases of A and B should not exceed 20 psi above the inflation specified for the maximum load of the tire.

Note 2: Load limits at various speed for:
 Tires used in highway service at Restricted Speed.
 Mining and Logging Tires used in Intermittent Highway Service.

THE MAXIMUM LOAD AND INFLATION CAPACITY OF THE RIM MUST NOT BE EXCEEDED.

Load Limits At Various Speeds

Tires Rated At 75 MPH And Radial Ply Truck Tires Used On Improved Surfaces

(These tables apply to tires only. Consult rim/wheel manufacturer for rim/wheel load and inflation capacities.)

Tire And Rim Association Standard

FOR METRIC AND WIDE BASE TIRES		
SPEED RANGE (MPH)	RADIAL PLY TIRES	
	INFL. PRESSURE CHANGE	% LOAD CHANGE
71 thru 75	No Increase	None
66 thru 70	No Increase	None
51 thru 65	No Increase	None
41 thru 50	No Increase	+7%
31 thru 40	No Increase	+9%
21 thru 30	+10 psi	+12%
11 thru 20	+15 psi	+17%
6 thru 10	+20 psi	+25%
2.6 thru 5	+20 psi	+45%
Creep thru 2.5	+20 psi	+55%
Creep (2)	+30 psi	+75%
Stationary	+30 psi	+105%

FOR CONVENTIONAL TIRES		
SPEED RANGE (MPH)	RADIAL PLY TIRES	
	INFL. PRESSURE CHANGE	% LOAD CHANGE
71 thru 75	No Increase	None
66 thru 70	No Increase	None
51 thru 65	No Increase	None
41 thru 50	No Increase	+9%
31 thru 40	No Increase	+16%
21 thru 30	+10 psi	+24%
11 thru 20	+15 psi	+32%
6 thru 10 (1)	+30 psi	+60%
2.6 thru 5 (1)	+30 psi	+85%
Creep thru 2.5 (1)	+30 psi	+115%
Creep (1) (2)	+40 psi	+140%
Stationary (1)	+40 psi	+185%

NOTES

1. Apply these increases to Dual Loads and Inflation Pressures.
2. Creep - Motion for not over 200 feet in a 30-minutes period.


Note 1: The inflation pressures shown in the minimum cold pressures for the various loads listed.
Higher pressures should be used as follows:

- A. When required by the above speed/load table.
- B. When higher pressures are desirable to obtain improved operating performance. For speeds above 20 mph, the combined increases of A and B should not exceed 20 psi above the inflation specified for the maximum load of the tire.

THE MAXIMUM LOAD AND INFLATION CAPACITY OF THE RIM MUST NOT BE EXCEEDED.

Definitions

New Tire Dimensions

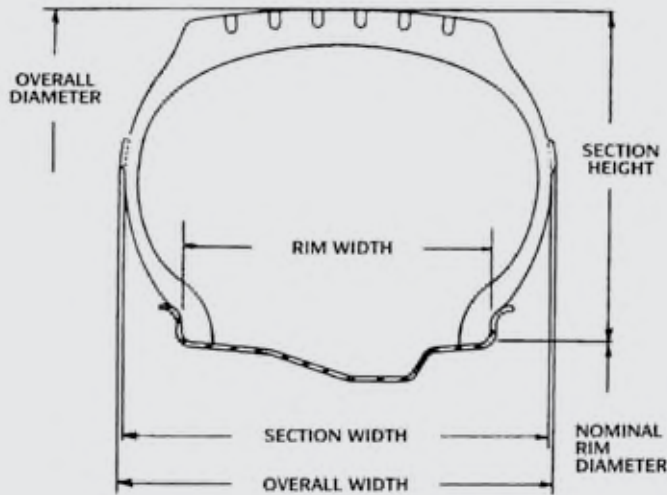

Load Range Designation-Ply Rating Equivalency Table

Kilograms x 2.205 = Lbs.
 mm x .03937 = Inches
 kPa x .145 = psi

LOAD RANGE	PLY RATING
A	2
B	4
C	6
D	8
E	10
F	12
G	14
H	16
J	18
L	20
M	22
N	24


Aspect Ratio	Section Height Section Width
Rim Width	Linear distance between the flanges of the rim.
Static Loaded Radius	Distance from wheel axle centerline to supporting tread surface at a given load and pressure in a static condition.
Tire (Overall) Width	The width of a new tire, including 24-hour inflation growth, and including protective side ribs, bars and decorations.
Section Height	Half the difference between the overall diameter and the nominal rim diameter.
Overall Diameter	The diameter of an inflated tire at the outermost surface of the tread, including 24-hour inflation growth.
Revolutions Per Mile	Measured number of revolutions for a tire traveling one mile. This can vary with speed, load, and inflation.
Tread Width	Distance across tread from shoulder to shoulder.
Width Loaded	Tire width (overall) under rated load conditions.
Minimum Dual Spacing	Minimum dual tire centerline to centerline measurement.
Section Width	Linear distance between outside of sidewalls of inflated tire (exclusive of markings, etc.).

Low Aspect Ratio Tires

24.5 Inch Highway Size

(USING TYPICAL DESIGN DIMENSIONS)

Match Tire For Speed And Axle Weights

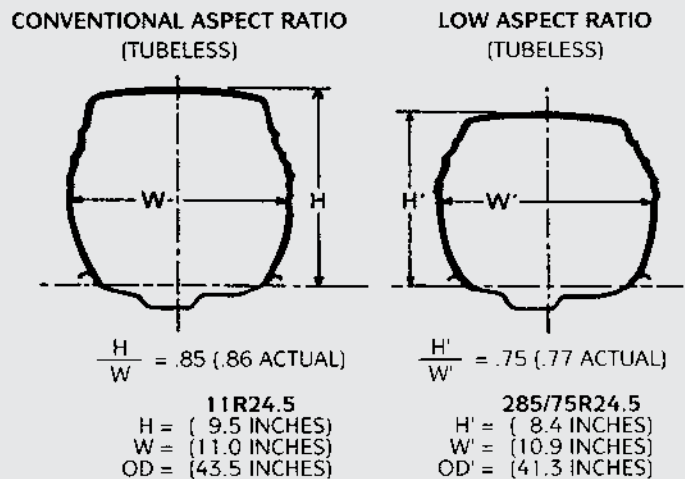

In a tire selection process, it is mandatory that consideration be given to selecting a tire size and load range which at least equals the maximum load requirements by axle position (steer, drive or trail). All highway truck tires have load limits established for tires used in normal highway service. Therefore, when selecting a tire for service, both the carrying capacity and speed implications must be considered.

TIRE LOAD LIMITS AT VARIOUS COLD INFLATION PRESSURES										
THE PRESSURE IS MINIMUM FOR LOAD										
MAXIMUM SPEED OF 65 (MPH)						Example for LRG				
SIZE			70	75	80	85	90	95	100	105
			(480)	(520)	(550)	(590)	(620)	(660)	(690)	(720)
11R22.5	Dual	kg	1990	2080	2160	2250	2360	2460	2560	2650 (G)
		lbs	4380	4580	4760	4950	5205	5415	5625	5840 (G)
	Single	kg	2050	2160	2260	2370	2500	2600	2700	2800 (G)
		lbs	4530	4770	4990	5220	5510	5730	5950	6175 (G)
11R24.5	Dual	kg	2110	2210	2300	2390	2500	2580	2660	2725 (G)
		lbs	4660	4870	5070	5260	5510	5675	5840	6005 (G)
	Single	kg	2190	2300	2410	2520	2650	2770	2890	3000 (G)
		lbs	4820	5070	5310	5550	5840	6095	6350	6610 (G)

For example, when selecting tires for a tractor and trailer combination with a gross combination weight (GCW) of 80,000 lbs. and an axle weight distribution of 12,000 lbs. on the steer, 34,000 lbs. on the tandem drive and 34,000 lbs. on the tandem trailer axles, the most common conventional tire sizes used are 11R22.5 Load Range G and 11R24.5 Load Range G. The load and inflation schedule according to the Tire and Rim Association tables for these sizes is shown above.

Safety Warnings

Tire Demounting And Mounting Safety Precautions



SAFETY WARNING


SERIOUS INJURY OR DEATH MAY RESULT FROM:







EXPLOSION OF TIRE RIM ASSEMBLY DUE TO IMPROPER MOUNTING - USE SAFETY CAGE & CLIP-ON EXTENSION AIR HOSE. ONLY SPECIALLY TRAINED PERSONS SHOULD MOUNT TIRES.




WARNING

Tire and wheel servicing can be dangerous, and should be done by trained personnel using proper tool and procedures and safety precautions in the RMA's "Demounting and Mounting Procedures for Trucks/Bus Tires" and "Inspection procedures for identification of potential zipper ruptures in steel cord radial medium and light truck tires" charts and service bulletins.

Failure to comply with these procedures may result in faulty positioning of the tire and/or rim parts, and cause the assembly to burst with explosive force, sufficient to cause serious injury or death. Never mount or use damaged tires or rims.

MISAPPLICATION/IMPROPER INFLATION/OVERLOADING SAFETY WARNINGS



WARNING

There is danger of serious injury or death if a tire of one bead diameter is installed on a rim or wheel of a different rim diameter.


Re-assembly and inflation of mismatched parts can result in serious injury or death. Just because parts come in together does not mean they belong together. Check for proper matching of all rim parts before putting any parts together.

Always replace a tire of exactly the same bead diameter designation and suffix letters.


For example: A 16" tire goes on a 16" rim. Never mount a 16" tire on a 16.1" or 16.5" rim. A 16.1" tire goes on a 16.1" Never mount a 16.1" tire on a 16" or 16.5" rim. A 16.5" tire goes on a 16.5" rim. Never mount a 16.5" tire on a 16" or 16.1" rim.

While it is possible to pass a 16" diameter tire over the lip or flange of a 16.1" or 16.5" size diameter rim, it cannot be inflated enough to position itself against the rim flange. If an attempt is made to seat the tire bead by inflating, the tire bead will break with explosive force and could cause serious injury or death.

Rims of different diameters and tapers cannot be interchanged. The following diagram illustrates the difference between rims of two different tapers and diameters.

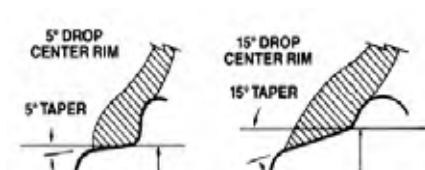

The following diagram shows how beads of a 16" tire will not seat on a 16.5" rim. The beads cannot be forced out against the rim flanges by using more air pressure because this will break the beads and the tire will explode with force sufficient to cause serious injury or death.



Never assemble a tire and rim unless you have positively identified and correctly matched the parts.

Safety Warnings

Tire Demounting And Mounting Safety Precautions


WARNING

NEVER inflate beyond 40 pounds pressure to seat beads.
NEVER stand, lean or reach over the assembly during inflation.
Inspect both sides of the tire to be sure that the beads are evenly seated. If tire is mounted on a machine that does not have a positive lock-down device to hold the wheel, inflation should be done on a safety cage. If both beads are not properly seated when pressure reaches 40 pounds air pressure, completely deflate the assembly, reposition the tire and/or tube on the rim, re-lubricate and reinflate. Inflating beyond 40 pounds air pressure when trying to seat the beads is a DANGEROUS PRACTICE that may break a tire bead (or even the rim) with explosive force, possibly resulting in serious injury or death. After the beads are fully seated, pressure may be increased above 40 psi to operating pressures, not to exceed the maximum labeled on the tire sidewall.

WARNING

Permanent tire damage due to under inflation and/or overloading cannot always be detected. Any tire known or suspected to have been run at 80% or less of normal operating inflation pressure and/or overloaded, could possibly have permanent structural damage (steel cord fatigue). Ply cords weakened by under inflation and/or overloading may break one after another, until a rupture occurs in the upper sidewall with accompanying instantaneous air loss and explosive force. This can result in serious injury or death.

Any tire of having been operated and under inflated and/or overloaded must be approached with caution. Completely deflate the tire by removing the valve core before removing the tire/rim/wheel assembly from the vehicle. After removing from the vehicle, clearly identify the tire so it will not be reinflated **until carefully inspected by a trained technician** to determine the cause of under inflation, as well as any tire damage resulting from under inflation and/or overloading.

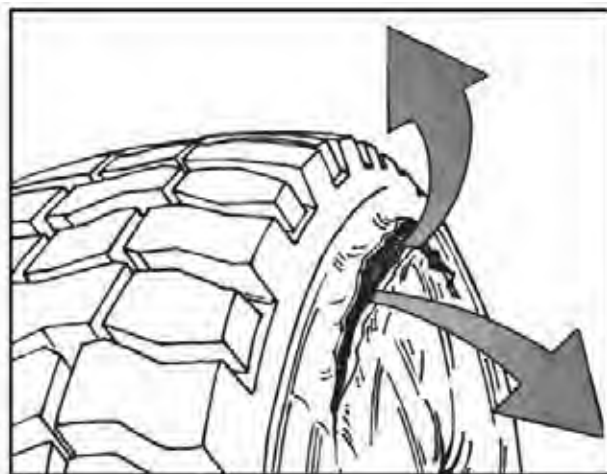

WARNING

The use of any flammable material during tire servicing is absolutely prohibited. Use of starting fluid ether, gasoline, or any other flammable material to lubricate, seal or seat the beads of a tubeless tire can cause the tire to explode or can cause the explosive separation of the tire/rim assembly resulting in serious injury or death.

This practice may also result in undetected damage to the tire or rim that could result in failure of the tire in service.

Safety Warnings




FIGURE 1

STAY OUT OF THE TRAJECTORY AS INDICATED BY SHADED AREA
Note: Under some circumstances, the trajectory may deviate from its expected path.

Always deflate tires before handling. Inflate only in safety cage.



FIGURE 2

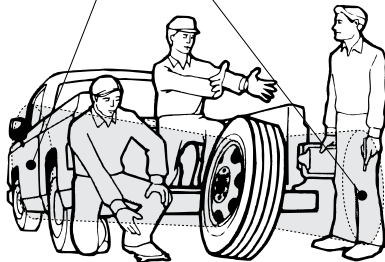


FIGURE 3

The air pressure contained in a tire is dangerous. The sudden release of this pressure by a tire blow-out or side ring separation can cause serious injury or death. Stay out of the trajectory as indicated by shaded area. When installing the tire/rim assembly on the vehicle, it will be impossible to stay out of the trajectory; however, at all other time you and all others must stay out of the trajectory.



WARNING

Tire explosions can cause death or personal injury or property damage.

Excessive speed in a free-running, unloaded tire can cause it to “explode” from extreme centrifugal force.



WARNING

When mounting dual disc wheels on a vehicle, be sure to carefully check and retighten or re-torque inner cap nuts before mounting the outer wheel. In demounting the outer wheel, there is a possibility that the inner cap nuts may have been loosened accidentally.

NEVER rework, weld, heat, or braze the tire/wheel/rim. Heating the rim of tire/wheel/rim. Heating the rim of tire/wheel/rim assembly can cause a tire to explode, causing serious injury or death,

NEVER hammer, strike or pry any type of tire/rim assembly while the tire contains inflation pressure. Do not attempt to seat any part while the tire contains any inflation pressure. This could result in serious injury

Regrooving

Continental, General Tire, AmeriSteel, and Euzkadi brand truck tires that have “REGROOVABLE” molded on the sidewall may be regrooved. After regrooving, it is required that 3/32” of under tread remains to cover the top ply. It is the responsibility of the regroover to assure that all Federal Regulations are met. For further clarification, see Code of Federal Regulations: Title 49, Transportation; Parts 569 and 393.75.

Service Descriptions


Continental Tire the Americas, LLC provides a service description onto the sidewall of all premium products.

This service description, which consists of one or more load indices and speed symbols, is located close to the tire size designation on the sidewall of the tire.

The load index relates to the maximum load carrying capacities allowed at the speed indicated by the speed symbol.

The speed symbol relates to the maximum speed allowed for the load carrying capacities associated with the load index.

The following is an example of a load index / speed symbol associated with a medium radial truck tire:

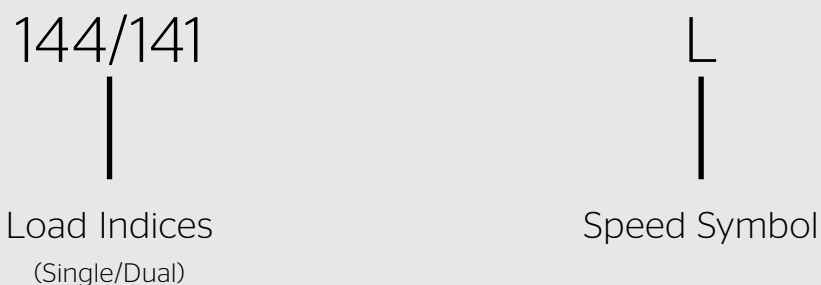

The attached chart shows the comparison of load index to load and speed symbol to maximum speed for radial truck tire products.

Consult your local Continental Tire representative for confirmation of the suitability of the tire/wheel assembly for the intended service.

Truck-Bus Metric Tires

International Load Index Numbers

LOAD INDEX	Kg	Lbs.
119	1360	3000
120	1400	3085
121	1450	3195
122	1500	3305
123	1550	3415
124	1600	3525
125	1650	3640
126	1700	3750
127	1750	3860
128	1800	3970
129	1850	4080
130	1900	4190
131	1950	4300
132	2000	4410
133	2060	4540
134	2120	4675
135	2180	4805
136	2240	4940
137	2300	5070
138	2360	5205
139	2430	5355
140	2500	5510
141	2575	5675
142	2650	5840
143	2725	6005
144	2800	6175

LOAD INDEX	Kg	Lbs.
145	2900	6395
146	3000	6610
147	3075	6780
148	3150	6940
149	3250	7160
150	3350	7390
151	3450	7610
152	3550	7830
153	2650	8050
154	3750	8270
155	3875	8540
156	4000	8820
157	4125	9090
158	4250	9370
159	4375	9650
160	4500	9920
161	4625	10200
162	4750	10500
163	4875	10700
164	5000	11000
165	5150	11400
166	5300	11700
167	5450	12000
168	5600	12300
169	5800	12800
170	6000	13200

SPEED SYMBOL	SPEED (kmh)	SPEED (mph)
F	80	50
G	90	56
J	100	62
K	110	68
L	120	75
M	130	81
N	140	87
P	150	93
Q	160	99
R	170	106
S	180	112
T	190	118

Truck Tire Tread Depth Conversion Table to Percent Of Wear:

Original Tire Tread Depths in 32nds →

Tread Remaining ↓	32nd	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	32	37	38	39	40	41	32nd	Tread Remaining ↑
2/32	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	2/32
3/32	90	91	92	92	93	93	94	94	94	95	95	95	95	96	96	96	96	96	96	96	97	97	97	97	97	97	97	3/32
4/32	80	82	83	85	86	87	88	88	89	89	90	90	91	91	92	92	92	93	93	93	94	94	95	95	95	95	95	4/32
5/32	70	73	75	77	79	80	81	82	83	84	85	86	86	87	88	88	89	89	90	91	92	92	92	92	92	92	92	5/32
6/32	60	64	67	69	71	73	75	76	78	79	80	81	82	83	83	84	85	85	86	86	87	89	89	89	89	89	90	6/32
7/32	50	55	58	62	64	67	69	71	72	74	75	76	77	78	79	80	81	81	82	83	86	86	86	86	87	87	87	7/32
8/32	40	45	50	54	57	60	63	65	67	68	70	71	73	74	75	76	77	78	79	80	83	83	84	84	84	85	8/32	
9/32	30	36	42	46	50	53	56	59	61	63	65	67	68	70	71	72	73	74	75	77	80	81	81	82	82	82	9/32	
10/32	20	27	33	38	43	47	50	53	56	58	60	62	64	65	67	68	69	70	71	73	77	78	78	79	79	79	10/32	
11/32	10	18	25	31	36	40	44	47	50	53	55	57	59	61	63	64	65	67	68	70	74	75	76	76	77	77	11/32	
12/32	0	9	17	23	29	33	38	41	44	47	50	52	54	57	58	60	62	63	64	67	71	72	73	74	74	74	12/32	
13/32		0	8	15	21	27	33	35	39	42	45	45	50	52	54	56	58	59	61	63	69	69	70	71	72	72	13/32	
14/32			0	8	14	20	25	29	33	37	40	43	45	48	50	52	54	56	57	60	66	67	68	68	69	69	14/32	
15/32				0	7	13	19	24	28	32	35	38	41	43	46	48	50	52	54	57	63	64	65	66	67	67	15/32	
16/32					0	6	13	18	22	26	30	33	36	39	42	44	46	48	50	53	60	61	62	63	64	64	16/32	
17/32						0	6	12	17	21	25	29	32	35	38	40	42	44	46	50	57	58	59	61	62	62	17/32	
18/32							0	6	11	16	20	24	27	30	33	36	39	41	43	47	54	56	57	58	59	59	18/32	
19/32								0	6	11	15	19	23	26	29	32	35	37	39	43	51	53	54	55	56	56	19/32	
20/32									0	5	10	14	18	22	25	28	31	33	36	40	49	50	51	53	54	54	20/32	
21/32										0	5	10	14	17	21	24	27	30	32	37	46	47	49	50	51	51	21/32	
22/32											0	5	9	13	17	20	23	26	29	33	43	44	46	47	49	49	22/32	
23/32												0	9	9	13	16	19	22	25	30	40	42	43	45	46	46	23/32	
24/32													0	4	8	12	15	19	21	27	37	39	41	42	44	44	24/32	
25/32															0	4	8	12	15	18	23	34	36	38	39	41	25/32	
26/32																0	4	8	11	14	21	31	33	35	37	38	26/32	
27/32																	0	4	7	11	17	29	31	32	34	36	27/32	
28/32																		0	4	7	13	26	28	30	32	33	28/32	
29/32																			0	4	10	23	25	27	29	31	29/32	
30/32																				0	7	20	22	24	26	28	30/32	
31/32																					3	17	19	22	24	26	31/32	
32/32																					0	14	17	19	21	23	32/32	
33/32																						11	14	16	18	21	33/32	
34/32																						9	11	14	16	18	34/32	
35/32																						6	8	11	13	15	35/32	
36/32																						3	6	8	11	13	36/32	
37/32																						0	3	5	8	10	37/32	
38/32																							0	3	5	8	38/32	
39/32																								0	3	5	39/32	
40/32																									0	3	40/32	
41/32																										0	41/32	

SAFETY WARNING

SERIOUS INJURY MAY RESULT FROM:

Explosion of tire/rim assembly due to improper mounting - use safety cage and clip on extension air hose. Only specially trained persons should mount tires.

Tire failure due to misapplication/improper inflation/overloading - follow tire manufacturer's instructions. Check inflation pressure frequently with gauge.

A tire must always match the diameter requirements of the rim to which it is being mounted. For example, a 16 inch tire must always be mounted on a 16 inch rim. Also, when replacing the truck type radial tires, use only wheels approved for radial tires.

Retread Casing Fitment Guide

Tread Width Followed By Tire Sizes

150	185 (continued)	205 (continued)	215 (continued)	225 (continued)	245 (continued)	390
9R22.5	245/70R19.5	225/70R19.5	225/70R19.5	12.00R24	12.00R24	445/50R22.5
215/85R16	265/70R19.5	225/75R16	245/70R19.5	11R24.5	11R22.5	455/55R22.5
160	255/70R22.5	235/75R17.5	265/70R19.5	12R24.5	11R24.5	400
215/85R16	10R17.5	235/85R16	285/70R19.5	230	250	445/50R22.5
225/75R16	9R22.5	245/70R17.5	255/70R22.5	275/80R22.5	365/80R20	455/55R22.5
235/85R16	10R22.5	245/70R19.5	275/70R22.5	295/75R22.5	305/70R22.5	410
215/75R17.5	195	245/75R16	275/80R22.5	285/75R24.5	315/80R22.5	445/50R22.5
235/75R17.5	215/85R16	255/70R22.5	295/75R22.5	11R22.5	12.00R24	455/55R22.5
10R17.5	225/75R16	265/70R19.5	285/75R24.5	12R22.5	260	
9R22.5	235/85R16	275/70R22.5	10R22.5	12.00R24	315/80R22.5	
170	245/75R16	275/80R22.5	11R22.5	11R24.5	305/75R24.5	270
215/85R16	215/75R17.5	285/70R19.5	12R22.5	12R24.5	315/80R22.5	
225/75R16	235/75R17.5	285/75R24.5	12.00R24	235	305/75R24.5	
235/85R16	225/70R19.5	295/75R22.5	11R24.5	275/80R22.5	280	
215/75R17.5	245/70R19.5	245/75R22.5	12R24.5	295/75R22.5	315/80R22.5	
235/75R17.5	265/70R19.5	265/75R22.5	220	285/75R24.5	290	
225/70R19.5	255/70R22.5	210	235/75R17.5	11R22.5	365/80R20	
10R17.5	10R17.5	225/75R16	245/70R17.5	12R22.5	385/65R22.5	
9R22.5	9R22.5	235/85R16	245/70R19.5	12.00R24	320	
10R22.5	10R22.5	245/75R16	265/70R19.5	11R24.5	365/80R20	
180	200	235/75R17.5	285/70R19.5	12R24.5	385/65R22.5	
215/85R16	225/75R16	245/70R17.5	255/70R22.5	240	425/65R22.5	
225/75R16	235/85R16	225/70R19.5	275/70R22.5	275/80R22.5	340	
235/85R16	245/75R16	245/70R19.5	275/80R22.5	295/75R22.5	18R19.5	
245/75R16	215/75R17.5	265/70R19.5	295/75R22.5	295/80R22.5	18R22.5	
215/75R17.5	235/75R17.5	285/70R19.5	295/80R22.5	305/70R22.5	445/65R22.5	
235/75R17.5	245/70R17.5	255/70R22.5	285/75R24.5	315/80R22.5	445/65R19.5	
225/70R19.5	225/70R19.5	275/70R22.5	10R22.5	285/75R24.5	445/50R22.5	
245/70R19.5	245/70R19.5	275/80R22.5	11R22.5	11R22.5	425/65R22.5	
255/70R22.5	265/70R19.5	295/75R22.5	12R22.5	12R22.5	350	
10R17.5	255/70R22.5	285/75R24.5	12.00R24	12.00R24	18R19.5	
9R22.5	10R17.5	10R22.5	11R24.5	11R24.5	18R22.5	
10R22.5	10R22.5	11R22.5	12R24.5	12R24.5	445/65R22.5	
185	12.00R24	12R22.5	225	245	445/65R19.5	
215/85R16	205	12.00R24	285/70R19.5	295/75R22.5	445/50R22.5	
225/75R16	10R22.5	11R24.5	275/80R22.5	275/80R22.5	425/65R22.5	
235/85R16	11R22.5	12R24.5	295/75R22.5	285/75R24.5	360	
245/75R16	11R24.5	215	295/80R22.5	295/80R22.5	445/65R22.5	
215/75R17.5	12.00R24	235/85R16	285/75R24.5	365/80R20	380	
235/75R17.5	12R22.5	235/75R17.5	11R22.5	305/70R22.5	445/65R22.5	
225/70R19.5	12R24.5	245/70R17.5	12R22.5	315/80R22.5		

***Not a technical recommendation or guide.** For use as sales information only. Please consult your local authorized ContiLifeCycle dealer for technical specifications.

HorsePower UnTamed

Continental's Loyalty Rewards Program

30,000+ Reward Options

The HorsePower UnTamed catalog has more than 30,000 items, including brand-name hunting and sporting goods, electronics, and more.

Concierge Service

With assistance from the HorsePower team, you can redeem points earned for unique and fulfilling rewards not found in the extensive HorsePower Untamed online offering.

HORSEPOWER

untamed

Buy-Up Options

You'll have the option to purchase points to increase your buying power. If you don't have enough points in your account to redeem for an item in your shopping cart, you'll have the option to buy the points needed.

Warehouse Dash for a Premier Status Participant

Earn Premier status and be entered in a drawing to win a trip for two to New York City. The winner will participate in a timed dash through a warehouse filled with electronics, housewares, jewelry, sporting equipment, tools and more.

Enroll today! Contact your Continental Representative to learn more!

Need a Representative? Call 1 (800) 450-4028



Thank You For Staying With Us

We value your loyalty, now allow us to return the favor. Keep track of the tires you sell each month and turn sales into rewards.



Some Sweet Rewards For You

Collect points to earn rewards. Other dealers have earned airline tickets, hotel rooms, 50" HD TV, Apple MacBook, John Deere Riding Tractor, a Wilson Football, Cookware Set, a Remington and more!



Earning Points is Easy

Once enrolled, you'll have 45 days from the end of the month to submit tire sales. Simply login and use the Power Page to upload invoices and submit claims. Points will be instantly deposited into your account upon claim approval.

HorsePower Untamed is available by invitation only to a select group of individual salespeople selling to fleets and users directly. No wholesale or intercompany transfers are permitted in this program. No sales may be aggregated; but must be solely the reporting participant's sales. Any tax liability is the individual's responsibility. A valid individual W-9 tax form including your SSN (not a company tax ID) must be on file with Continental to redeem in the program. As well as TD1 form for Canadian participants. Aggregation of points over groups of salesman and/or tax information that is of a business nature will not be permitted. Owners and dealer principals are not eligible to participate in this program.

Continental Tire the Americas, LLC
1830 MacMillan Park Drive
Fort Mill, SC 29707
Phone: 704-583-3900
www.continental-truck.com

Continental Tire Canada, Inc.
6110 Cantay Road
Mississauga, ON L5R 3W5
Phone: 905-568-1303

Continental Tire de México S.A. de C.V.
Av. Santa Fe 170 Piso 7
Col. Lomas de Santa Fé
Del. Alvaro Obregón C.P. 01210 México D.F.
Phone: 52 + 55-15-00-09-00


INSIDE SALES / U.S.
800-450-4028 East
800-450-3187 West

INSIDE SALES / Canada
800-461-9681 English
800-361-2844 French

Original Equipment Sales
800-776-2022

Commercial Specialty Tires
877-235-0102

Technical Customer Services & Warranty
800-726-7113

 @ContiTruckTires

